

NORTHERN NEVADA

Public Health

Air Quality

2025 Ambient Air Monitoring Network
Assessment

May 22, 2025

NORTHERN NEVADA

Public Health

Serving Reno, Sparks & Washoe County

MISSION

To improve and protect our community's quality of life and increase equitable opportunities for better health.

Table of Contents

Introduction.....	1
Purpose.....	1
Public Inspection Process	1
Agency Contacts	1
Regional Description	2
Climate.....	2
Population and Demographic Trends.....	3
Current Air Quality Attainment Status	4
Monitoring Network History	5
Statistical Analysis.....	6
Number of Other Parameters Monitored	7
Trends Impact	8
Measured Concentrations.....	9
Deviation from the NAAQS	19
Inter-Site Correlation Analysis for Ozone and PM _{2.5}	21
Area Served.....	24
Population Served	25
Situational Analysis	26
Suggested Modifications to the Monitoring Network	28
Recommendations for the Overall AQMD Monitoring Network.....	28
Site-Specific Recommendations	28
Future Monitoring Requirements.....	32
Tables.....	iii
Figures.....	iii
Acronyms and Abbreviations	iv

Appendices

- Appendix A: Statistical Analysis (Area Served and Population Served Analyses)
- Appendix B: Situational Analysis (Area Served and Population Served Analyses)
- Appendix C: Public Inspection Plan

Tables

1. Reno, NV CBSA Population Trends (2005, 2015-2024)	3
2. Reno, NV CBSA Population Projections (2025-2034).....	3
3. Attainment Status.....	4
4. Historical Monitoring Operations	5
5. Classification and Number of Parameters Monitored.....	7
6. Years of Data	8
7. 2024 Design Values vs. NAAQS (Percentage of the NAAQS).....	20
8. Area Served (2024)	24
9. Population Served (2024)	25
10. Area Served (2024) with Verdi Site Addition and South Reno Removal	26
11. Population Served (2024) with Verdi Site Addition and South Reno Removal.....	27
12. Summary of Recommended Modifications to the Existing AQMD Network.....	29

Figures

1. Washoe County, Nevada.....	2
2. 8-hr O ₃ Design Values (2015-2024)	10
3. 1-hr CO Design Values (2015-2024).....	11
4. 8-hr CO Design Values (2015-2024).....	12
5. 1-hr NO ₂ Design Values (2015-2024)	13
6. Annual NO ₂ Design Values (2015-2024)	14
7. 1-hr SO ₂ Design Values (2015-2024)	15
8. 24-hr PM _{2.5} Design Values (2015-2024)	16
9. Annual PM _{2.5} Design Values (2015-2024)	17
10. 24-hr PM ₁₀ First Highs (2015-2024).....	18
11. 8-hr Daily Max Ozone Correlation Matrix	22
12. Daily PM _{2.5} Correlation Matrix.....	23

Acronyms and Abbreviations

AQI	Air Quality Index
AQMD	Northern Nevada Public Health Air Quality Management Division
AQS	Air Quality System
BAM	Beta Attenuation Monitor
CARB	California Air Resources Board
CBSA	Core Based Statistical Area
CFR	Code of Federal Regulations
CO	Carbon Monoxide
DMV	Department of Motor Vehicles
EPA	U.S. Environmental Protection Agency
FEM	Federal Equivalent Method
FRM	Federal Reference Method
GAL	Galletti
HA 87	Hydrographic Area 87
INC	Incline
LEM	Lemmon Valley
NAAQS	National Ambient Air Quality Standards
NAMS	National Air Monitoring Station
NCDC	National Climatic Data Center
NCore	National Core Multipollutant Monitoring Station
NDOT	Nevada Department of Transportation
NO ₂	Nitrogen Dioxide
NO _x	Oxides of Nitrogen
NO _y	Reactive Oxides of Nitrogen
O ₃	Ozone
PLM	Plumb-Kit
PM _{2.5}	Particulate Matter less than or equal to 2.5 microns in aerodynamic diameter
PM ₁₀	Particulate Matter less than or equal to 10 microns in aerodynamic diameter
PM _{10-2.5}	PM ₁₀ minus PM _{2.5}
ppb	Parts per Billion
ppm	Parts per Million
REN	Reno4
RNO	Reno3
SLAMS	State and Local Air Monitoring Station
SO ₂	Sulfur Dioxide
SPK	Sparks
SPM	Special Purpose Monitoring
SPS	Spanish Springs
SRN	South Reno
STN	Speciation Trends Network
TBD	To be determined
TOL	Toll

Introduction

Purpose

The U.S. Environmental Protection Agency (EPA) finalized amendments to the ambient air monitoring regulations on October 17, 2006 (71 FR 61236). The amendments revise the technical requirements for certain types of ambient air monitoring sites, add provisions for monitoring of PM_{10-2.5}, and reduce certain monitoring requirements for criteria pollutants. Monitoring agencies must also conduct network assessments every five years as required by 40 CFR 58.10(d) which states,

The State, or where applicable local, agency shall perform and submit to the EPA Regional Administrator an assessment of the air quality surveillance system every 5 years to determine, at a minimum, if the network meets the monitoring objectives defined in appendix D to this part, whether new sites are needed, whether existing sites are no longer needed and can be terminated, and where new technologies are appropriate for incorporation in the ambient air monitoring network. The network assessment must consider the ability of existing and proposed sites to support air quality characterization for areas with relatively high populations of susceptible individuals (e.g., children with asthma), and, for any sites that are being proposed for discontinuance, the effect on data users other than the agency itself, such as nearby States and Tribes or health effects studies. For PM_{2.5}, the assessment also must identify needed changes to population-oriented sites. The State, or where applicable local, agency must submit a copy of this 5-year assessment, along with a revised annual network plan to the Regional Administrator. The first assessment is due July 1, 2010.

Public Inspection Process

This monitoring network assessment was available for public inspection from May 22 to June 22, 2025, at the AQMD website (OurCleanAir.com). A hardcopy of the plan was also available at the AQMD office. See Appendix C for AQMD's Public Inspection Plan.

Agency Contacts

For information or questions regarding the 2025 Ambient Air Monitoring Network Assessment, please contact the following individuals of the AQMD.

Francisco Vega, Division Director
(775) 784-7211, or fvega@nnph.org

Craig Petersen, Supervisor, Monitoring and Planning
(775) 784-7233, or cpetersen@nnph.org


Matthew McCarthy, Senior Air Quality Specialist
(775) 784-7205, or mmccarthy@nnph.org

Regional Description

Washoe County is located in the northwest portion of Nevada. It is bounded by California, Oregon, and the Nevada counties of Humboldt, Pershing, Storey, Churchill, Lyon, and Carson City (Figure 1). The Truckee Meadows is approximately 200 square miles in size and situated in the southern portion of Washoe County. It is geographically identified as Hydrographic Area 87 (HA 87) as defined by the State of Nevada, Division of Water Resources. Most of Washoe County's population lives in and around the Truckee Meadows.

The Truckee Meadows sits at an elevation of 4,400 feet above sea level and is surrounded by mountain ranges. To the west, the Sierra Nevada rises to elevations of 9,000 to 11,000 feet. Hills to the east reach 6,000 to 8,000 feet. The Truckee River, flowing from the Sierra Nevada eastward, drains into Pyramid Lake to the northeast of the Truckee Meadows.

Figure 1
Washoe County, Nevada

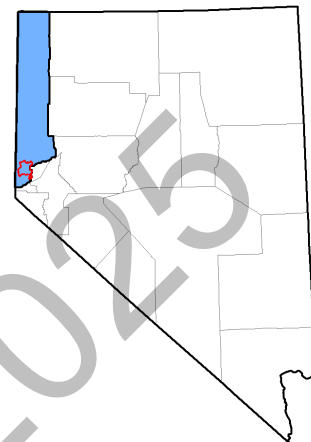

Climate

Average annual wind speed measured at the Reno-Tahoe International Airport is 6.4 miles per hour (mph). January is the calmest month (4.5 mph) with April being the windiest (8.3 mph). Wintertime (November-January) averages 4.9 mph and summertime (June-August) averages 7.2 mph.

Most of Reno's precipitation falls from November through March in the form of rain and snow. Reno receives an average of 7.35 inches of precipitation per calendar year (1991-2020 climate normals).

Population and Demographic Trends

The Reno, NV Core Based Statistical Area (CBSA) includes Washoe County and Storey County. The CBSA population has consistently increased through the last two decades. The net increase since 2005 has been approximately 29.3 percent (Table 1). Much of this growth has occurred in southern Washoe County, specifically the area in and adjacent to the Truckee Meadows.

Table 1
Reno, NV CBSA Population Trends (2005, 2015-2024)¹

Population (1,000's)	2005	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024
Washoe County	396.8	441.9	448.3	451.9	460.2	469.8	473.6	485.1	501.6	508.8	513.9
Storey County	4.0	4.0	4.0	4.1	4.2	4.3	4.3	4.4	4.4	4.5	4.5
CBSA Total	400.8	445.9	452.3	456.0	464.4	474.1	477.9	489.5	506.0	513.3	518.4

The Reno, NV CBSA population projections (Table 2) are developed by the Nevada Department of Taxation using the Regional Economic Model, Inc model v3.2.0 which projects how the population might change given demographic and economic factors. The net population increase is projected to be approximately 7.3 percent over the next 10 years.

Table 2
Reno, NV CBSA Population Projections (2025-2034)²

Population (1,000's)	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034
Washoe County	526.4	533.5	539.1	544.0	548.4	552.5	556.1	559.3	562.1	564.6
Storey County	4.5	4.5	4.5	4.6	4.6	4.6	4.7	4.7	4.7	4.8
CBSA Total	530.9	538.0	543.6	548.6	553.0	557.1	560.8	564.0	566.8	569.4

¹ Nevada State Demographer, "Governor Certified Population Estimates of Nevada's Counties, Cities and Towns 2005 to 2024", 2024.

² Nevada State Demographer, "Nevada County Population Projections 2024 to 2043", 2024.

Current Air Quality Attainment Status

Table 3 lists the attainment status for each National Ambient Air Quality Standard (NAAQS) by pollutant, averaging time, and geographic area in Washoe County. Attainment designations are codified in [40 CFR 81.329](#). Additional detailed ambient air monitoring data may be found in the AQMD's [Air Quality Trends Reports](#). These reports are prepared annually and summarizes the ambient air monitoring data collected by the AQMD.

Table 3
Attainment Status

Pollutant	Averaging Time	Concentration	Geographic Area	Attainment Status
CO	1-hour	35 ppm	HA 87	Attainment
			Remainder of county	Unclassifiable/Attainment
	8-hour	9 ppm	HA 87	Attainment
			Remainder of county	Unclassifiable/Attainment
PM ₁₀	24-hour	150 µg/m ³	HA 87	Attainment
			Remainder of county	Unclassifiable
PM _{2.5}	24-hour	35 µg/m ³	HA 87	Attainment
			Remainder of county	Unclassifiable/Attainment
	Annual ³	9.0 µg/m ³	HA 87	Attainment
			Remainder of county	Unclassifiable/Attainment
O ₃	8-hour	0.070 ppm	Entire county	Unclassifiable/Attainment
All other pollutants	All averaging times	All concentrations	All geographic areas	Unclassifiable/Attainment

³ The annual PM_{2.5} standard was strengthened from 12.0 µg/m³ to 9.0 µg/m³ in February 2024. Although formal designations haven't been published by EPA, AQMD expects to be designated Attainment or Unclassifiable/Attainment.

Monitoring Network History

The AQMD has operated an ambient air monitoring network since the 1960's. By multi-agency cooperative agreement, the California Air Resources Board (CARB) monitored PM_{2.5} and NO₂ at the Incline site from 1999-2002. Table 4 lists the parameters monitored by pollutant and site over the last 25 years.

Table 4
Historical Monitoring Operations

AQS Site Name (AQS Site ID)	Ozone	PM _{2.5}	PM ₁₀	TSP	HC	CO	NO ₂	SO ₂	Lead
Incline (32-031-2002)	93-24	99-02	99-02			99-02	99-02		
Lemmon Valley (32-031-2009)	87-24		87			87-16			
Reno3 (32-031-0016)	82-19	99-19	88-19			83-19	84-19	11-19	
Reno4 (32-031-0031)	20-24	20-24	20-24			20-24	20-24	20-24	
Plumb-Kit (32-031-0030)			06-17						
South Reno (32-031-0020)	88-24		11-17			88-14			
Sun Valley (32-031-2006)			88-05						
Sparks (32-031-1005)	79-24	12-24	88-24			80-23			
Galletti (32-031-0022)		13-14	88-14			88-14			
Toll (32-031-0025)	02-24	19-24	02-24			02-16			
Spanish Springs (32-031-1007)	17-24	17-24	17-24						

Statistical Analysis

Site-by-site analyses are those that assign a ranking to individual monitors based on a particular metric. These analyses are good for assessing which monitors might be candidates for modification or removal. Site-by-site analyses do not reveal the most optimized network or how good a network is as a whole. In general, the metrics at each monitor are independent of the other monitors in the network. Several steps are involved in site-by-site analysis:

1. Determine which monitoring purposes are most important.
2. Assess the history of the monitor (including original purposes).
3. Select a list of site-by-site analysis metrics based on purposes and available resources.
4. Weight metrics based on importance of purpose.
5. Score monitors for each metric.
6. Sum scores and rank monitors.
7. Examine lowest ranking monitors for possible resource reallocation.

The low-ranking monitors should be examined carefully on a case-by-case basis. There may be regulatory or political reasons to retain a specific monitor. Also, the site could be made potentially more useful by monitoring a different pollutant or using a different technology. This assessment includes seven site-by-site statistical analyses - Number of Other Parameters Monitored; Trends Impact; Measured Concentrations; Deviation from the NAAQS; Area Served; Population Served, and Population Change.

Number of Other Parameters Monitored

Monitors that are collocated with other measurements at a particular air quality site are likely more valuable than sites that measure fewer parameters, particularly for source apportionment and other air quality studies. In addition, the operating costs can be leveraged among several instruments at these sites. Sites are ranked by the number of parameters (or instruments) that are collected at the particular site.

This analysis is performed by counting the number of other parameters that are measured at the physical site. Sites with many parameters measured are ranked highest. The metric addresses two aspects of monitor value. First, collocated measurements of several pollutants are valuable for many air quality analyses, such as source apportionment, model evaluation, and emission inventory reconciliation. Second, having a single site with multiple measurements is more cost-effective to operate than having monitors scattered at several sites.

Table 5
Classification and Number of Parameters Monitored

AQS Site Name (AQS Site ID)	Monitor Classifications	Number of Parameters Measured
South Reno (32-031-0020)	SLAMS	4
Toll (32-031-0025)	SLAMS	7
Reno4 (32-031-0031)	SLAMS/NCore	19
	Speciation Trends	65
Sparks (32-031-1005)	SLAMS	4
Spanish Springs (32-031-1007)	SLAMS	7
Incline (32-031-2002)	SLAMS	1
Lemmon Valley (32-031-2009)	SLAMS	1
Verdi (Future)	SLAMS	7

Trends Impact

Monitors that have a long historical record are valuable for tracking trends. In this analysis, sites are ranked based on the duration of the continuous measurement record. The analysis can be as simple as ranking the available monitors based on the length of the continuous sampling record. This technique places the most importance on sites with the longest continuous trend record.

Determining the trends impact of a monitor can be done simply. One approach is to rank sites based on their length of continuous sampling. Sites with the longest term of operation would score higher than those with shorter records, since they would be more useful for long-term trend analysis. Additional factors that could be used to adjust the simple ranking scale include: 1) The magnitude and direction of trends observed to date at the site, 2) the suitability of a site's location for monitoring trends after a significant event (i.e., enactment of a specific control measure), or 3) proximity of another monitor that could be used to continue the trend record. A site may be weighted as less important if changes in sampling and analysis methodology lead to a discontinuous record. Weighing these factors would require consideration of the overall goals of the monitoring network and the importance of the historical record.

Table 6
Years of Data

AQS Site Name (AQS Site ID)	Monitor Classifications	Years of Data
South Reno (32-031-0020)	SLAMS	37
Toll (32-031-0025)	SLAMS	23
Reno4 (32-031-0031)	SLAMS/NCore	5
	Speciation Trends	
Sparks (32-031-1005)	SLAMS	46
Spanish Springs (32-031-1007)	SLAMS	8
Incline (32-031-2002)	SLAMS	32
Lemmon Valley (32-031-2009)	SLAMS	38
Verdi (Future)	SLAMS	0

Measured Concentrations

Individual sites are ranked based on the concentration of pollutants they measure. Monitors that measure high concentrations or design values are ranked higher than monitors that measure low concentrations. Results can be used to determine which monitors are less useful in meeting the selected objective.

Sites that measure high concentrations are important for assessing NAAQS compliance, population exposure, and performing model evaluations. The analysis is relatively straightforward, requiring only the site design values or highest concentrations. The greater the design value or concentration, the higher the site rank. If more than one standard exists for a pollutant (i.e., 24-hr and annual averages), monitors can be scored for each standard.

Draft
May 22, 2025

Figure 2
8-hr O₃ Design Values
(2015-2024)

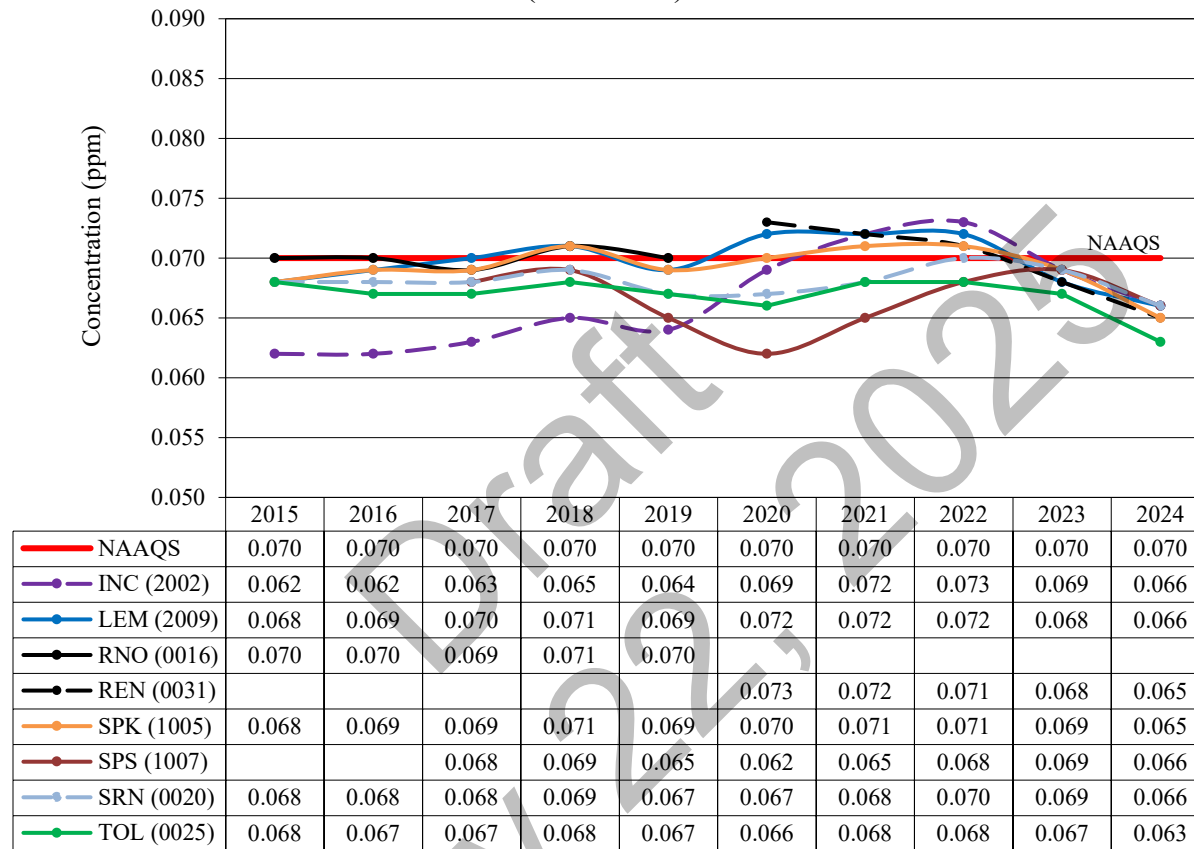


Figure 3
1-hr CO Design Values
(2015-2024)

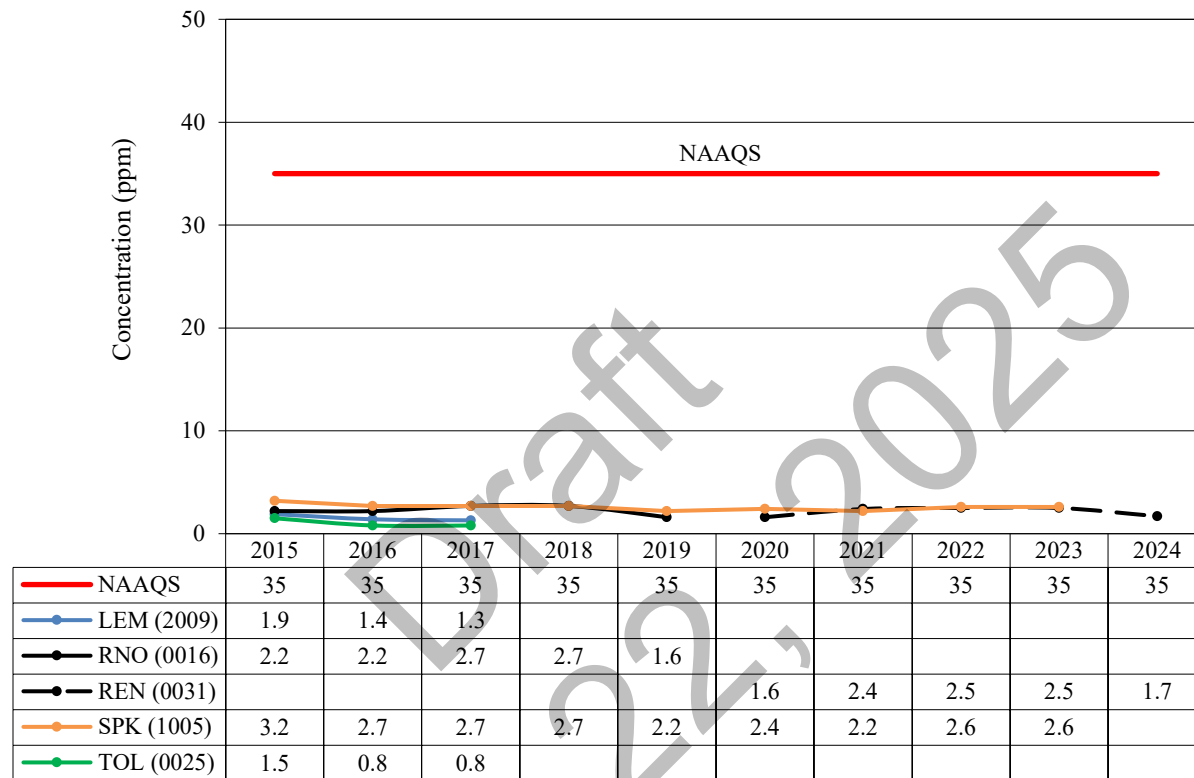


Figure 4
8-hr CO Design Values
(2015-2024)

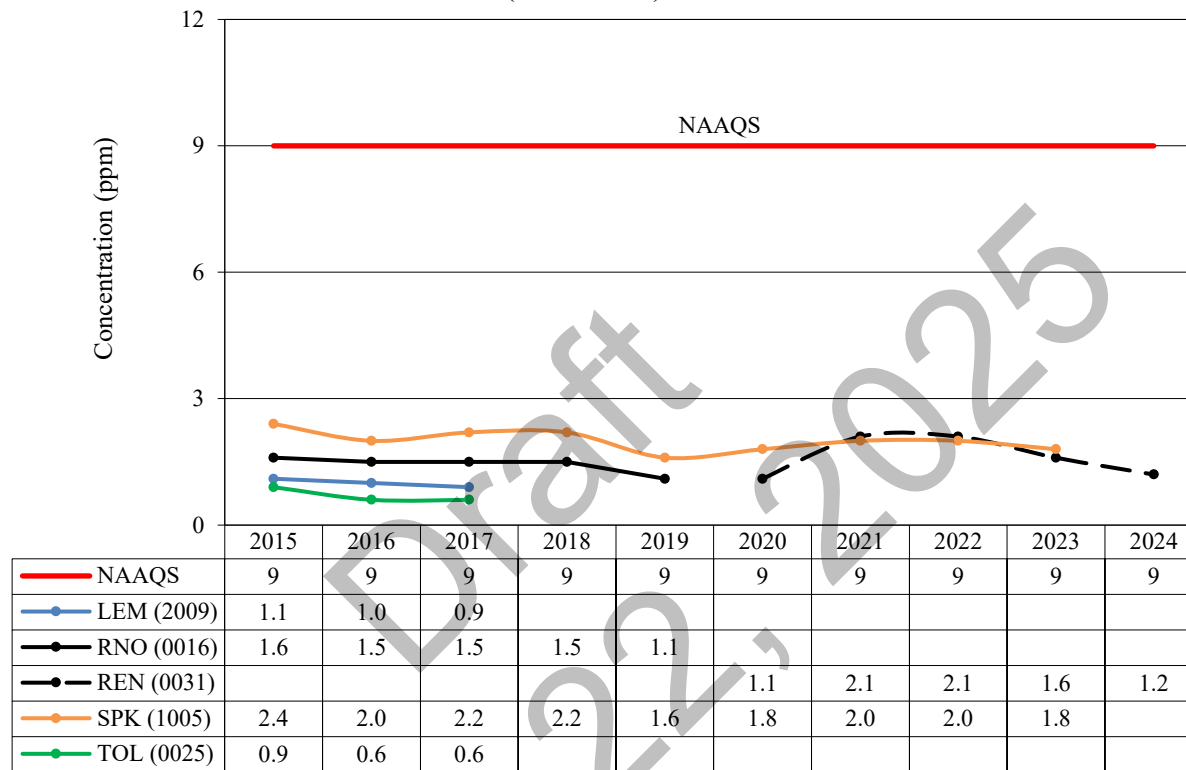


Figure 5
1-hr NO₂ Design Values
(2015-2024)

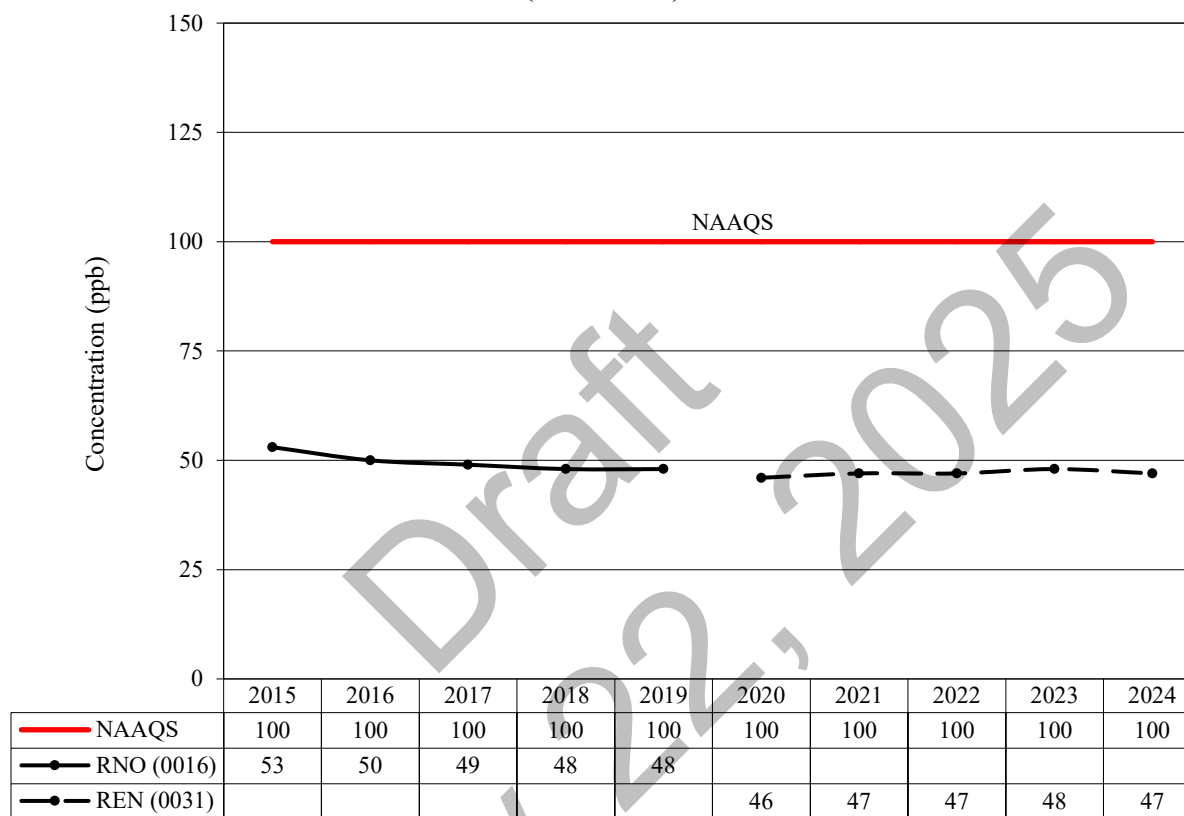


Figure 6
Annual NO₂ Design Values
(2015-2024)

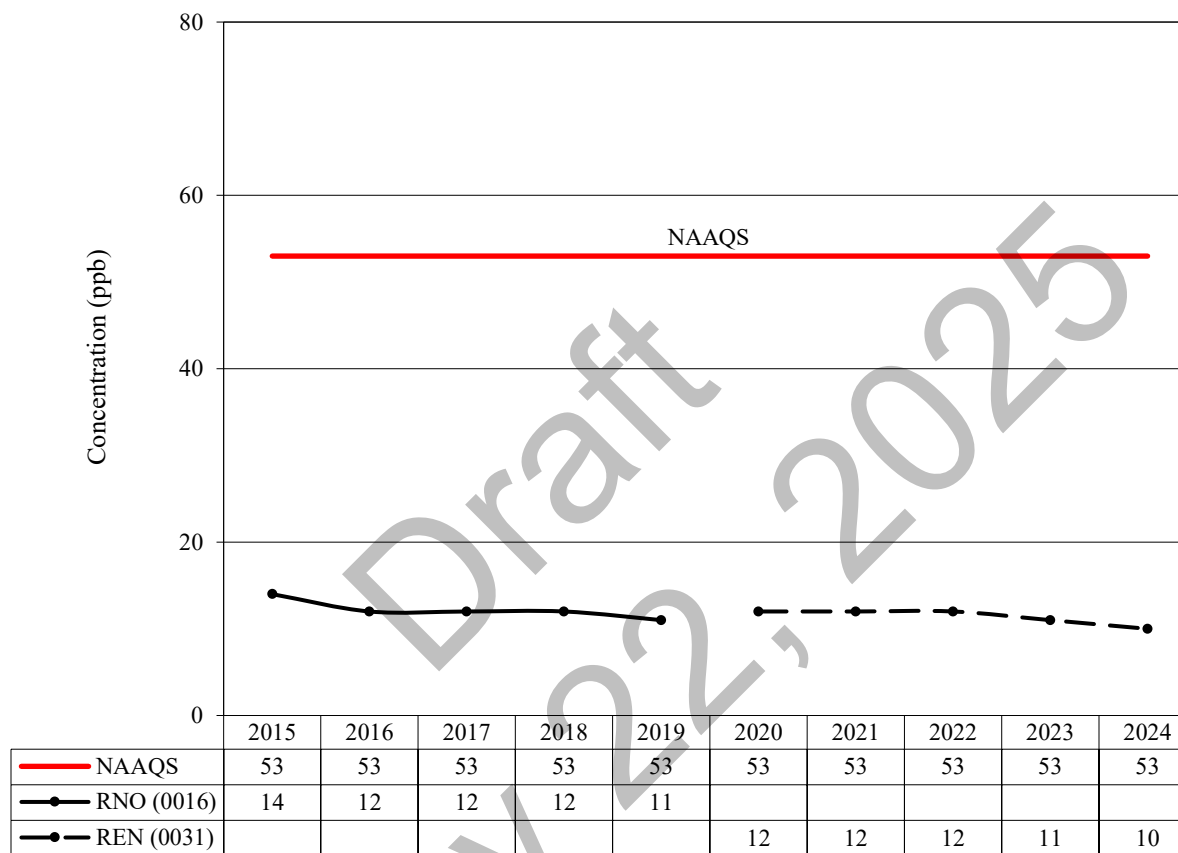


Figure 7
1-hr SO₂ Design Values
(2015-2024)

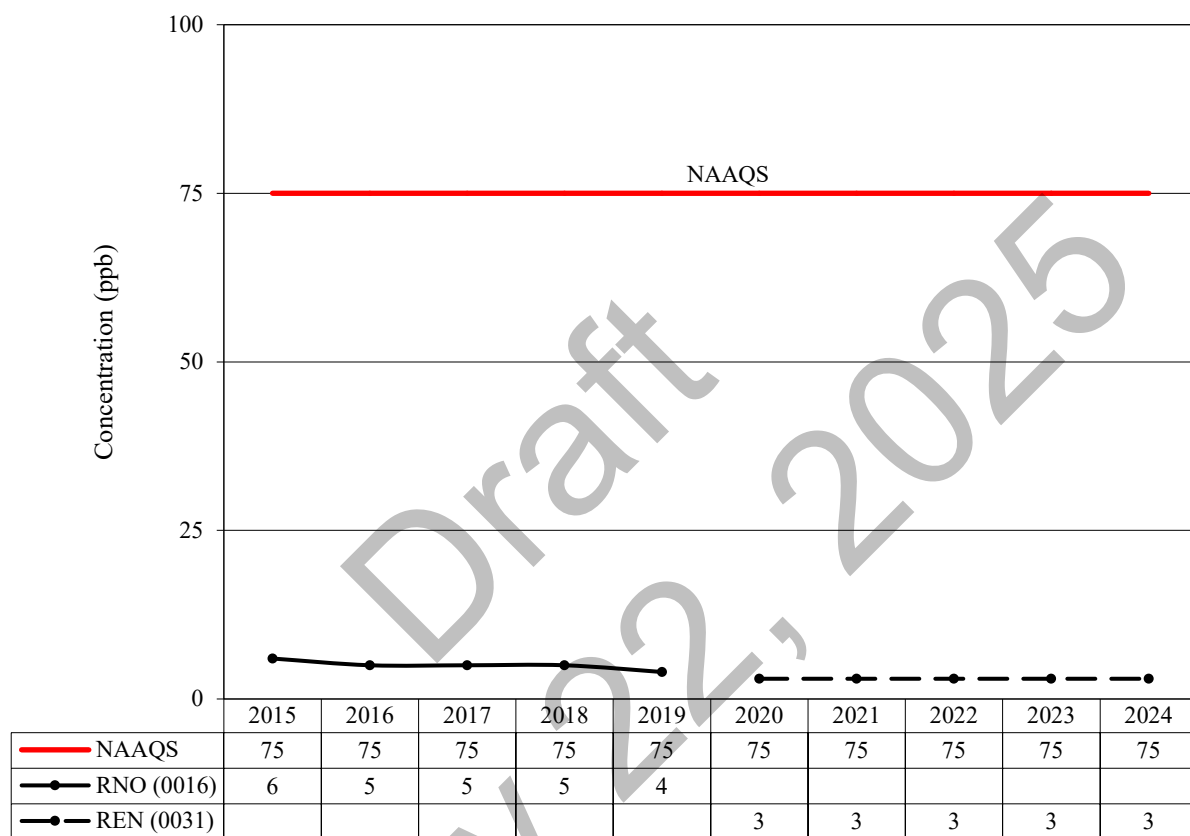


Figure 8
24-hr PM_{2.5} Design Values
(2015-2024)

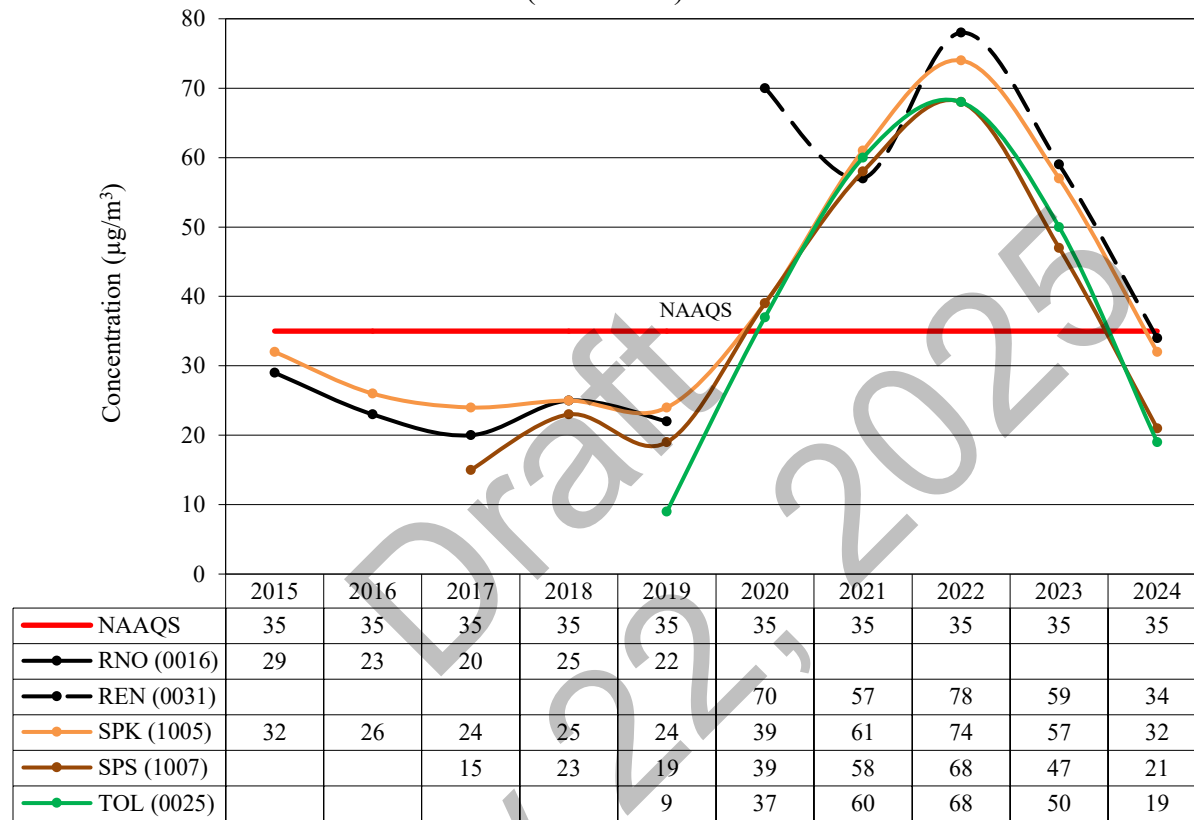


Figure 9
Annual PM_{2.5} Design Values
(2015-2024)


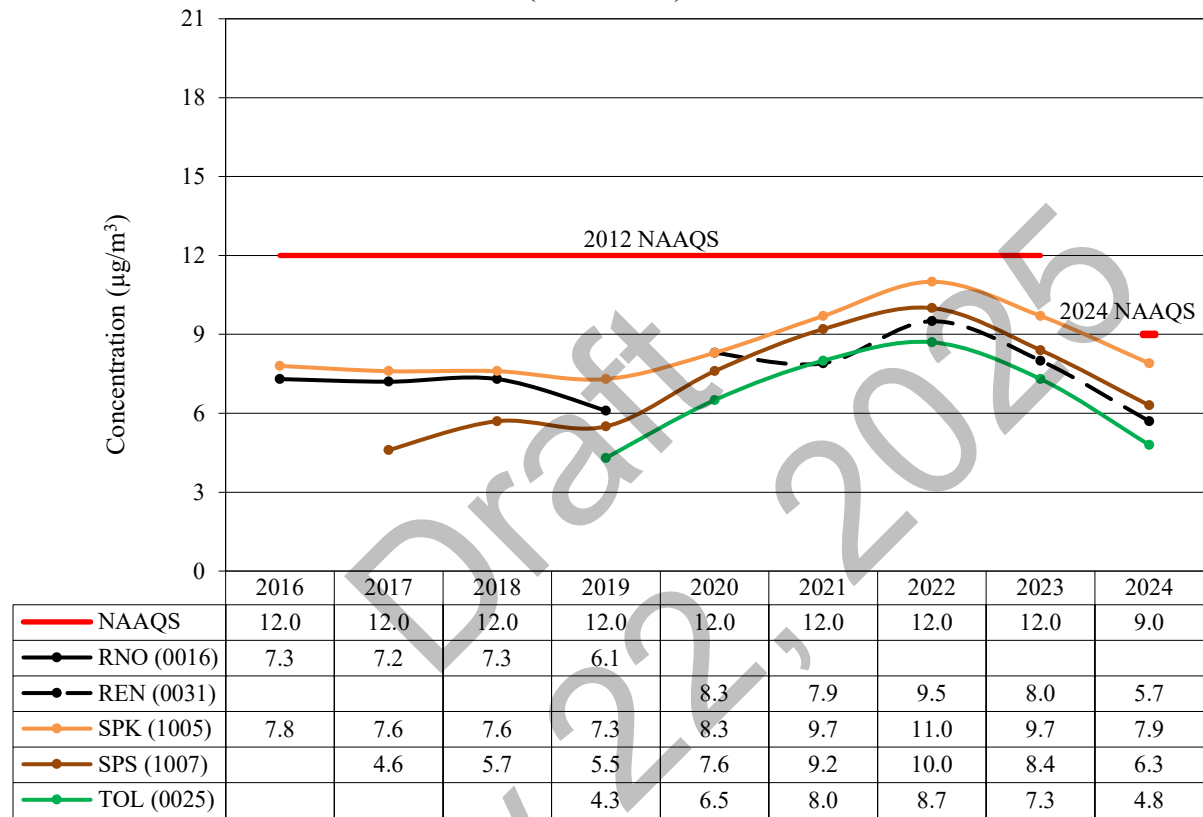


Figure 10
24-hr PM₁₀ First Highs
(2015-2024)

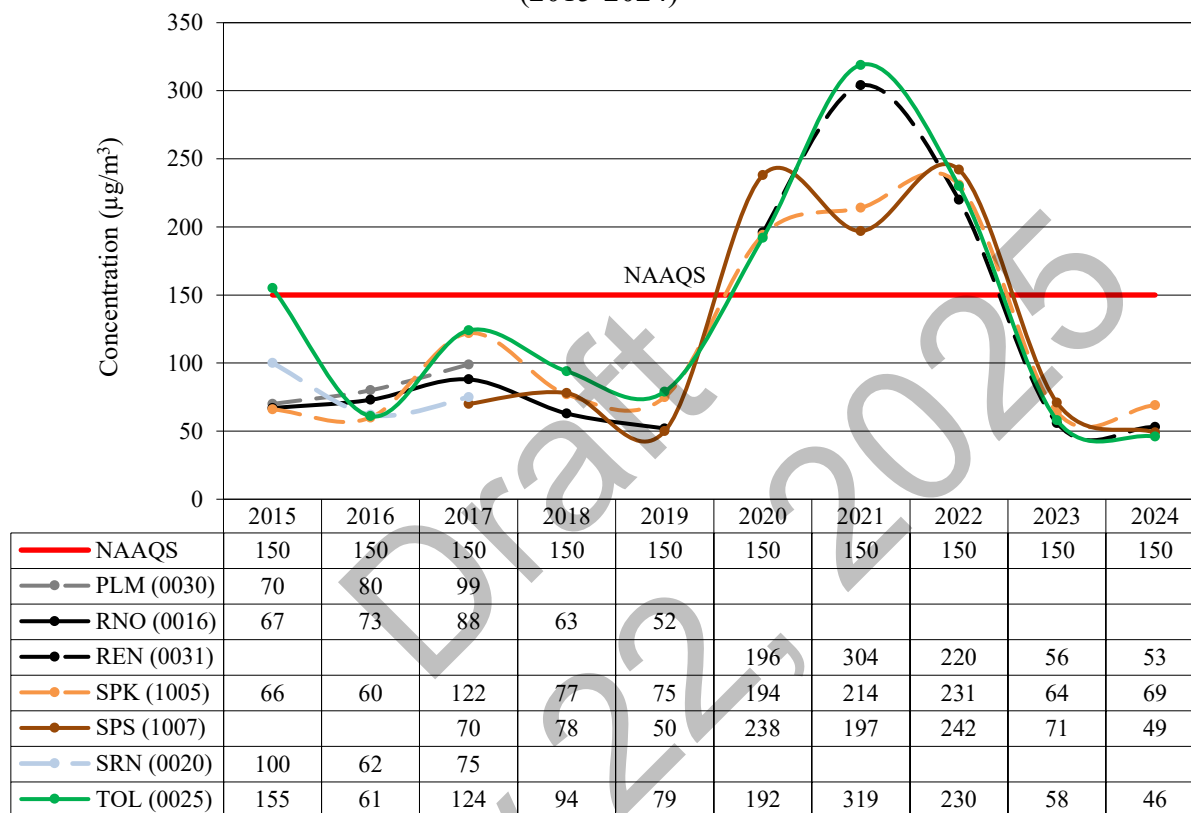

Deviation from the NAAQS

Sites that measure concentrations that are very close to the NAAQS exceedance threshold are ranked highest in this analysis. These sites may be considered more valuable for NAAQS compliance evaluation. Sites well above or below the threshold do not provide as much information in terms of NAAQS compliance.

This technique contrasts the difference between the standard and actual measurements or design values. It is a simple way to assess a monitor's value for evaluating compliance. The design values for each pollutant should be calculated as they impact regulatory compliance. If a pollutant has more than one standard (i.e., 24-hr and annual averages), monitors can be scored for each standard. The measured design value percentage of the NAAQS can be used to score each monitor. Monitors with the highest percentage will rank as most important.

Draft
May 22, 2025

Table 7
2024 Design Values vs. NAAQS
(Percentage of the NAAQS)

AQS Site Name (AQS Site ID)	O ₃	CO		NO ₂		SO ₂	Pb		PM _{2.5}		PM ₁₀
	(8-hr)	(1-hr)	(8-hr)	(1-hr)	(Annual)	(1-hr)	(Rolling 3-mo)	(Quarterly)	(24-hr)	(Annual)	(24-hr First Highs)
South Reno 32-031-0020	0.94	---	---	---	---	---	---	---	---	---	---
Toll 32-031-0025	0.90	---	---	---	---	---	---	---	0.54	0.53	0.31
Reno4 32-031-0031	0.93	0.05	0.13	0.47	0.19	0.04	---	---	0.97	0.63	0.35
Sparks 32-031-1005	0.93	---	---	---	---	---	---	---	0.91	0.88	0.46
Spanish Springs 32-031-1007	0.94	---	---	---	---	---	---	---	0.6	0.7	0.33
Incline 32-031-2002	0.94	---	---	---	---	---	---	---	---	---	---
Lemmon Valley 32-031-2009	0.94	---	---	---	---	---	---	---	---	---	---

--- = n/a

= ≥80% of NAAQS

Inter-Site Correlation Analysis for Ozone and PM_{2.5}

The NetAssess2025 app was developed by EPA's Office of Air Quality Planning and Standards (OAQPS). It is an update of the NetAssess app developed by LADCO for the 2015 5-year Ambient Air Monitoring Network Assessments. The Pearson Correlation Matrix Tool within the NetAssess2025 app was used for the Inter-Site Correlation Analysis for Ozone and PM_{2.5}.

The following figures provide information about how concentrations at monitors within the Reno, NV CBSA compare to one another. Each monitor comparison is represented by a square in the chart. The blue squares in the bottom-left corner show the correlation between each pair of monitors, with text indicating the number of days used in the calculation. The red squares in the top-right corner show the mean absolute difference in concentrations between each pair of monitors, with text indicating the distance in kilometers between each pair of monitors. The numbers along the diagonal indicate the most recent design value for each monitor.

Measured concentrations at one monitor are compared to concentrations at other monitors to determine if concentrations correlate temporally. Monitors with concentrations that correlate well (e.g., $R > 0.8$) with concentrations at another monitor may be redundant. Conversely, a monitor with concentrations that do not correlate with other nearby monitored concentrations may be unique and have more value for spatial monitoring objectives.

Figure 11
8-hr Daily Max Ozone Correlation Matrix


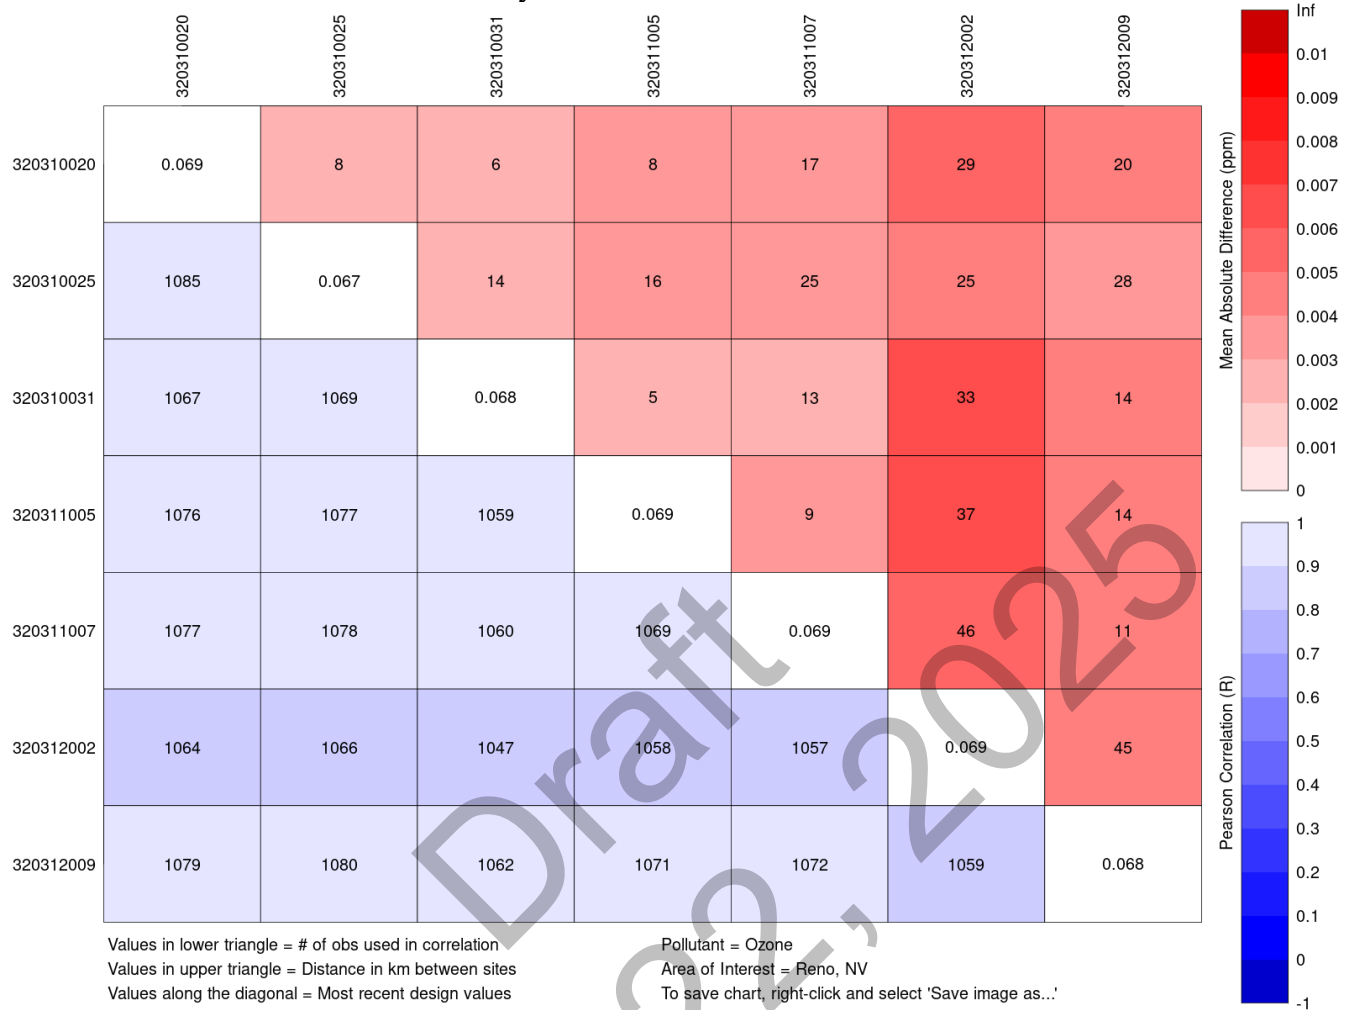


Figure 12
Daily PM_{2.5} Correlation Matrix

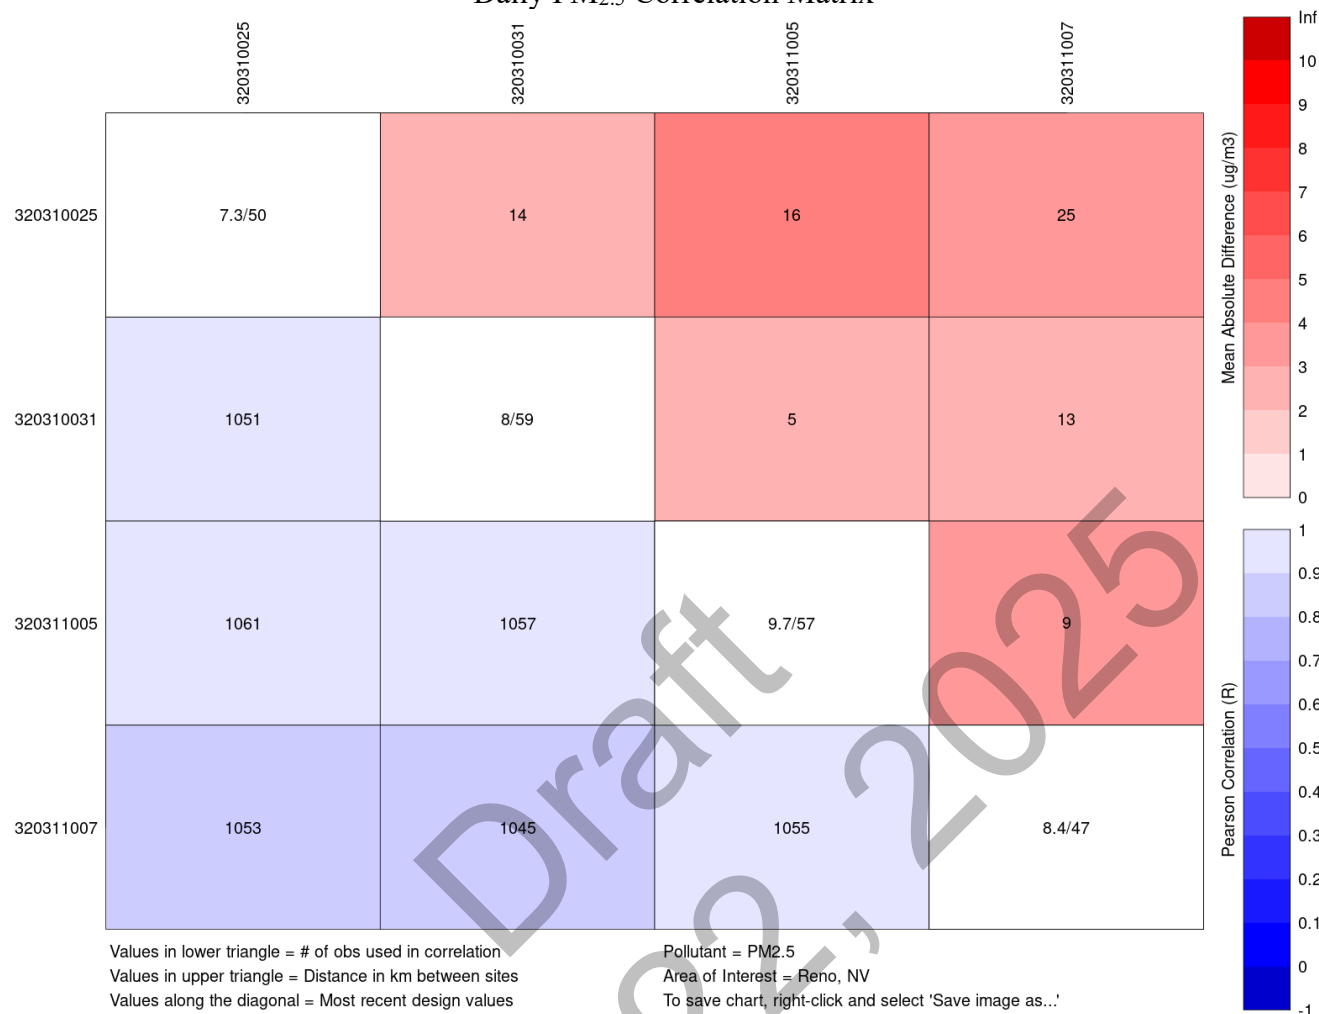

Area Served

Area served was one of five site-by-site criteria used in the national-scale network assessment. In the National Assessment, the “area served” metric was used as a proxy for the spatial coverage of each monitor. Thiessen polygons are applied as a standard technique in geography to assign a zone of influence or representativeness to the area around a given point. These polygons can be determined using EPA’s NetAssess2025 app. Calculating Thiessen polygons is one of the simplest quantitative methods for determining an area of representation around sites (see Appendix A). However, it is not a true indication of which site is most representative in concentration to a given area. Meteorology (including pollutant transport), topography, and proximity to population or emission sources are not considered, so some areas assigned to a particular monitor may actually be better represented by a different monitor. More accurate determinations of representative monitors require a more sophisticated spatial analysis technique, such as suitability modeling, photochemical modeling, or parameter weighted distance.

Table 8
Area Served (2024)

AQS Site Name (AQS Site ID)	Area Served (square miles) by Pollutant					
	O ₃	CO	NO ₂	SO ₂	PM ₁₀	PM _{2.5}
South Reno (32-031-0020)	38	---	---	---	---	---
Toll (32-031-0025)	363	---	---	---	561	561
Reno4 (32-031-0031)	58	6,532	6,532	6,532	161	161
Sparks (32-031-1005)	30	---	---	---	34	34
Spanish Springs (32-031-1007)	645	---	---	---	5,824	5,824
Incline (32-031-2002)	180	---	---	---	---	---
Lemmon Valley (32-031-2009)	5,267	---	---	---	---	---

Population Served

Large populations are associated with high emissions. Sites are ranked based on the number of people they represent. Area of representation can be determined using the Thiessen polygons. Populations at the census-tract or block-group level that fall within the area of representation of a monitor are assigned to that monitor (see Appendix A). This technique gives the most weight to sites that are in areas of high population and have large areas of representation.

Calculating the population served by a particular monitor requires two steps: 1) Determine the area of representation for each monitor; and 2) determine the population within each area of representation. Step 1 can be performed most simply using the Thiessen polygons technique; however, a more sophisticated method that takes into account distance, meteorology, topography, etc. could also be applied. Sites that score high with this metric are important for assessing population exposure. This technique was one of five site-by-site criteria used in the national-scale network assessment. Thiessen polygons are applied as a standard technique in geography to assign a zone of influence or representativeness to the area around a given point. The “population served” method can also be applied to assess the importance of monitors from an environmental justice perspective. The technique is the same, except populations of specific groups (i.e., low income or disadvantaged) are used instead of total population.

Table 9
Population Served (2024)

AQS Site Name (AQS Site ID)	Population Served (1,000's) by Pollutant					
	O ₃	CO	NO ₂	SO ₂	PM ₁₀	PM _{2.5}
South Reno (32-031-0020)	49.3	---	---	---	---	---
Toll (32-031-0025)	56.5	---	---	---	79.8	79.8
Reno4 (32-031-0031)	159.6	490.7	490.7	490.7	236.6	236.6
Sparks (32-031-1005)	75.6	---	---	---	83.1	83.1
Spanish Springs (32-031-1007)	74.4	---	---	---	91.0	91.0
Incline (32-031-2002)	11.4	---	---	---	---	---
Lemmon Valley (32-031-2009)	63.9	---	---	---	---	---

Situational Analysis

Situational analysis considers the entire ambient air monitoring network and individual monitors in more detail and may take into account criteria such as research, policy, and resource needs. This analysis reviewed a scenario that added one monitoring site (Verdi) and removed one monitoring site (South Reno). The site under consideration for addition would monitor for O₃, PM₁₀, PM_{2.5}, PM_{10-2.5}, and surface meteorology. Thiessen Polygons were used to determine Area Served and Population Served with the addition of the Verdi monitoring site, and removal of the South Reno monitoring site (see Appendix B). The site-by-site situational analyses are summarized in the next two tables and can be compared to the analyses without the new site addition and site removal in Tables 8 and 9.

Table 10
Area Served (2024) with Verdi Site Addition and South Reno Removal

AQS Site Name (AQS Site ID)	Area Served (square miles) by Pollutant					
	O ₃	CO	NO ₂	SO ₂	PM ₁₀	PM _{2.5}
Toll (32-031-0025)	381	---	---	---	449	449
Reno4 (32-031-0031)	52	6,532	6,532	6,532	73	73
Sparks (32-031-1005)	34	---	---	---	34	34
Spanish Springs (32-031-1007)	645	---	---	---	5,824	5,824
Incline (32-031-2002)	180	---	---	---	---	---
Lemmon Valley (32-031-2009)	5230	---	---	---	---	---
Verdi (Future)	59	---	---	---	200	200

Table 11
Population Served (2024) with Verdi Site Addition and South Reno Removal

AQS Site Name (AQS Site ID)	Population Served (1,000's) by Pollutant					
	O ₃	CO	NO _x	SO ₂	PM ₁₀	PM _{2.5}
Toll (32-031-0025)	68.5	---	---	---	77.4	77.4
Reno4 (32-031-0031)	175.8	490.7	490.7	490.7	205.3	205.3
Sparks (32-031-1005)	83.1	---	---	---	83.1	83.1
Spanish Springs (32-031-1007)	74.4	---	---	---	91.0	91.0
Incline (32-031-2002)	11.4	---	---	---	---	---
Lemmon Valley (32-031-2009)	58.3	---	---	---	---	---
Verdi (Future)	19.2	---	---	---	33.8	33.8

Suggested Modifications to the Monitoring Network

The AQMD network assessment focused primarily on the population and geography of HA 87 and directly adjacent areas. Consequently, the recommendations developed as a result of this assessment will concentrate on the southern portion of Washoe County as described in the Regional Description section of this document. The analyses provided an objective assessment of the current AQMD network and the recommendations offered in this section do not necessarily indicate how AQMD will eventually act to meet its objectives.

To meet the objectives of the AQMD network assessment, a suite of analyses was performed. The results of the individual analyses were summarized into a complete set of conclusions and recommendations. Recommendations were developed for the AQMD network as a whole and for individual monitoring sites within the network. The remainder of this section summarizes the overall AQMD network recommendations and the site-specific recommendations.

Recommendations for the Overall AQMD Monitoring Network

1. *Consider placing a neighborhood scale monitoring site in the West Reno/Verdi area.* Currently, the Reno4 monitoring site covers a large population. By placing an additional monitoring site just west of the HA 87 boundary, population exposure of PM₁₀, PM_{2.5}, PM_{10-2.5}, O₃, and surface meteorology could be collected. This would cover a dense population situated at a slightly higher elevation at the base of the Sierra Nevada foothills.
2. *Consider discontinuing all monitoring and closing the South Reno monitoring site.* Removing the South Reno monitoring site from the network would build capacity to initiate monitoring in West Reno/Verdi. The area and population served by the South Reno monitoring site would be absorbed primarily by the Toll monitoring site. The daily maximum 8-hour ozone concentration is highly correlated to both the Reno4 and Toll ozone monitor, thus having a low removal bias.

Site-Specific Recommendations

Table 12 summarizes the current monitoring objective of each site in the AQMD network and includes a summary of the recommended modifications to each site. The recommendations were developed by examining the results of the assessment as a whole.

Table 12
Summary of Recommended Modifications to the Existing AQMD Network

AQS Site Name (AQS Site ID)	Current Monitoring Objective	Recommended Modifications
South Reno (32-031-0020)	Located on the NV Energy property at 4110 Delucchi Lane, this site is in a transitional environment between open fields and office buildings. The site monitors highest concentration of O ₃ , wind speed, wind direction, and ambient temperature. The monitoring objectives are Public Information and NAAQS comparison.	<p><u>Site objective</u>: Consider discontinuing all monitoring and closing site.</p> <p><u>Parameters measured</u>: Consider discontinuing all monitoring and closing site.</p> <p><u>Other recommendations</u>: Consider discontinuing all monitoring and closing site.</p>
Toll (32-031-0025)	The Toll Road site is located at 684A State Route 341 (Geiger Grade), one-half mile east of US Highway 395. The site is near the edge of a residential neighborhood and adjacent to an area that may become commercially developed. This site monitors highest concentration of PM ₁₀ and population exposure of PM _{2.5} , PM _{10-2.5} , O ₃ , wind speed, wind direction, and ambient temperature.	<p><u>Site objective</u>: No recommended changes.</p> <p><u>Parameters measured</u>: No recommended changes.</p> <p><u>Other recommendations</u>: No recommended changes.</p>
Reno4 (32-031-0031)	Located at Libby C. Booth Elementary School at 1450 Stewart Street in Reno, this site is near the northern edge of the playground and bus loading/unloading zone. Reno4 began monitoring in January 2020 as a relocation of the Reno3 site. Reno4 is an NCore site and monitors for O ₃ , PM ₁₀ , PM _{2.5} , PM _{10-2.5} , Trace CO, Trace SO ₂ , NO _x , and Trace NO _y . Meteorological parameters including ambient temperature, relative humidity, wind speed, and wind direction are also monitored. This site is also part of EPA's national Speciation Trends Network (STN).	<p><u>Site objective</u>: No recommended changes.</p> <p><u>Parameters measured</u>: No recommended changes.</p> <p><u>Other recommendations</u>: No recommended changes.</p>

Table 12 (continued)
Summary of Recommended Modifications to the Existing AQMD Network

AQS Site Name (AQS Site ID)	Current Monitoring Objective	Recommended Modifications
Sparks (32-031-1005)	The Sparks site is located on US Postal Service property at 750 Fourth Street. The site is surrounded by commercial property, a residential neighborhood and is adjacent to Dilworth Middle School. This site monitors highest concentrations of PM _{2.5} and PM _{10-2.5} , and population exposure of PM ₁₀ , O ₃ , wind speed, wind direction, and ambient temperature. The monitoring objectives are Public Information and NAAQS comparison.	<u>Site objective</u> : No recommended changes. <u>Parameters measured</u> : No recommended changes. <u>Other recommendations</u> : No recommended changes.
Spanish Springs (32-031-1007)	This site is located on the north side of Lazy 5 Park in Spanish Springs. It is located in area among residences, parks, and open fields. This site monitors highest concentration for O ₃ and population exposure of PM ₁₀ , PM _{2.5} , PM _{10-2.5} , wind speed, wind direction, and ambient temperature. The monitoring objectives are Public Information and NAAQS comparison.	<u>Site objective</u> : No recommended changes. <u>Parameters measured</u> : No recommended changes. <u>Other recommendations</u> : No recommended changes.
Incline (32-031-2002)	This site is located in a Washoe County office building at 855 Alder Avenue and is outside HA 87. It is located in a residential/commercial neighborhood. This site only monitors highest concentration of O ₃ . The monitoring objective is NAAQS comparison.	<u>Site objective</u> : No recommended changes. <u>Parameters measured</u> : No recommended changes. <u>Other recommendations</u> : No recommended changes.
Lemmon Valley (32-031-2009)	Located at the Boys and Girls Club at 325 Patrician Drive, this site is outside HA 87. It is in a transitional area among residences, parks, and open fields. The site monitors highest concentration of O ₃ . The monitoring objective is NAAQS comparison.	<u>Site objective</u> : No recommended changes. <u>Parameters measured</u> : No recommended changes. <u>Other recommendations</u> : No recommended changes.

Table 12 (continued)
Summary of Recommended Modifications to the Existing AQMD Network

AQS Site Name (AQS Site ID)	Current Monitoring Objective	Recommended Modifications
West Reno/Verdi (Future)	Consider placing a neighborhood scale monitoring site in the West Reno/Verdi area. Currently, the Reno4 monitoring site covers a large population. By placing an additional monitoring site just west of the HA 87 boundary, population exposure of PM ₁₀ , PM _{2.5} , PM _{10-2.5} , O ₃ , and surface meteorology could be collected. This would cover a dense population situated at a slightly higher elevation at the base of the Sierra Nevada foothills. A formal request stating this proposal will be submitted prior to any modifications to follow the 40 CFR 58.14 criteria.	<p><u>Site objective:</u> Initiate monitoring for Public Information and NAAQS comparison.</p> <p><u>Parameters measured:</u> Initiate PM₁₀, PM_{2.5}, PM_{10-2.5}, O₃, wind speed, wind direction, and ambient temperature monitoring.</p> <p><u>Other recommendations:</u> Initiate as a SLAMS.</p>

Future Monitoring Requirements

None at this time.

Draft
May 22, 2025

Draft
May 22, 2025

NORTHERN NEVADA
Public Health

Air Quality


Please contact Craig Petersen for
questions and comments at,
cpetersen@nnph.org

Appendix A


Statistical Analysis (Area Served and Population Served Analyses)

Draft
May 22, 2025


Thiessen Polygons for AQMD's Current O₃ Monitoring Sites

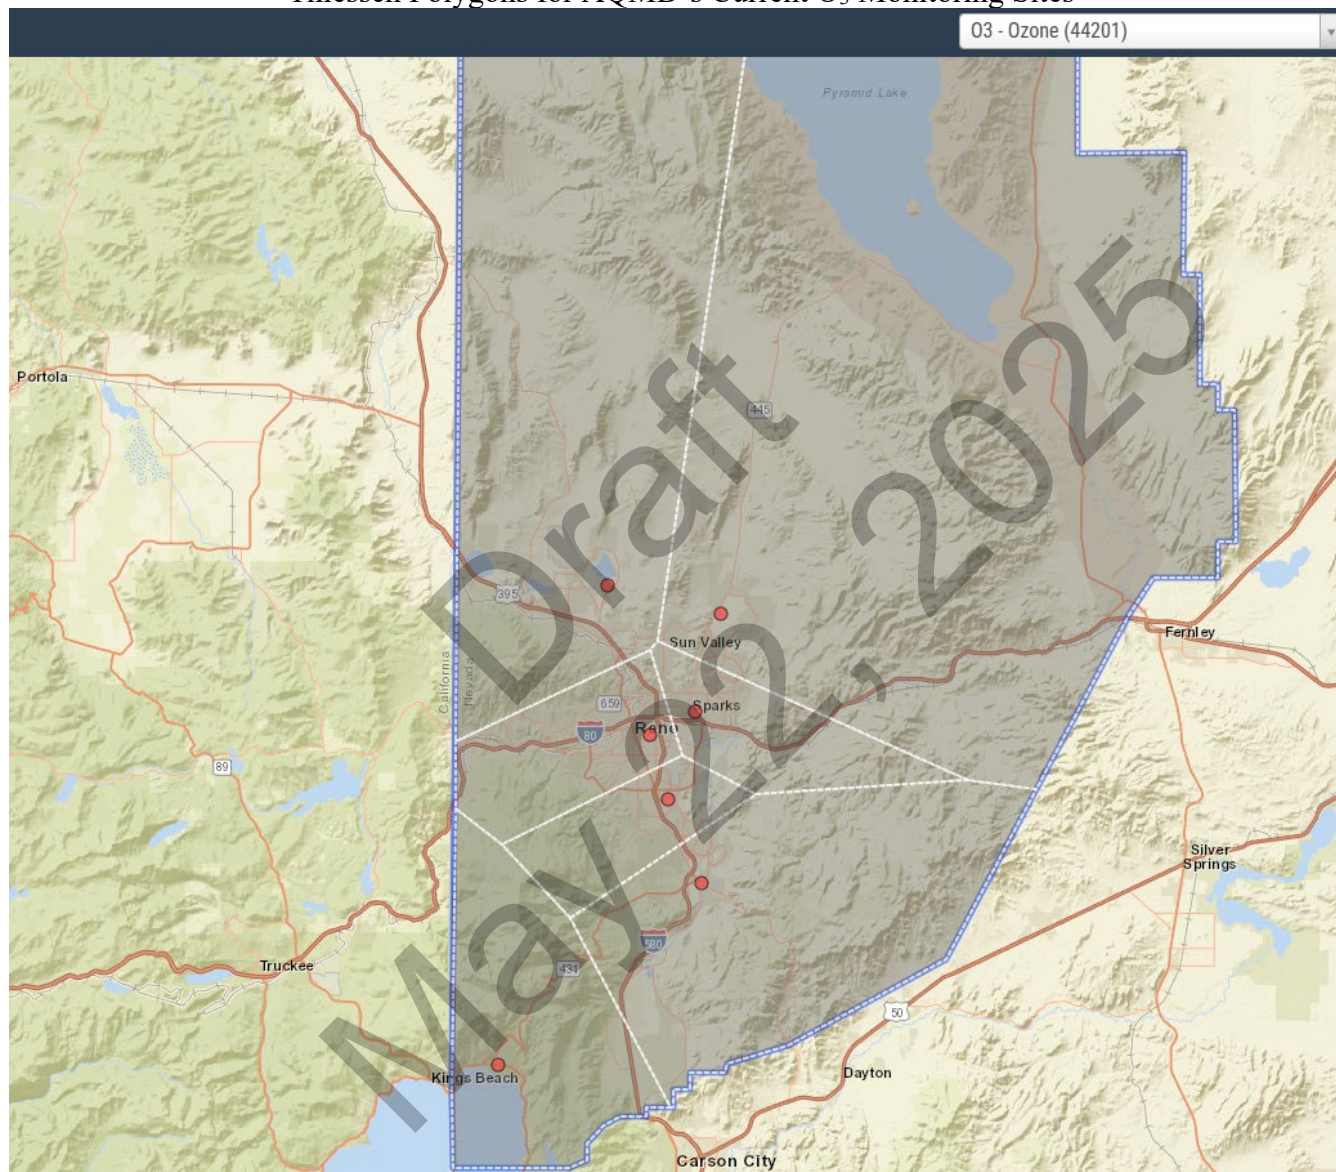


Thiessen Polygons for AQMD's Current CO Monitoring Sites

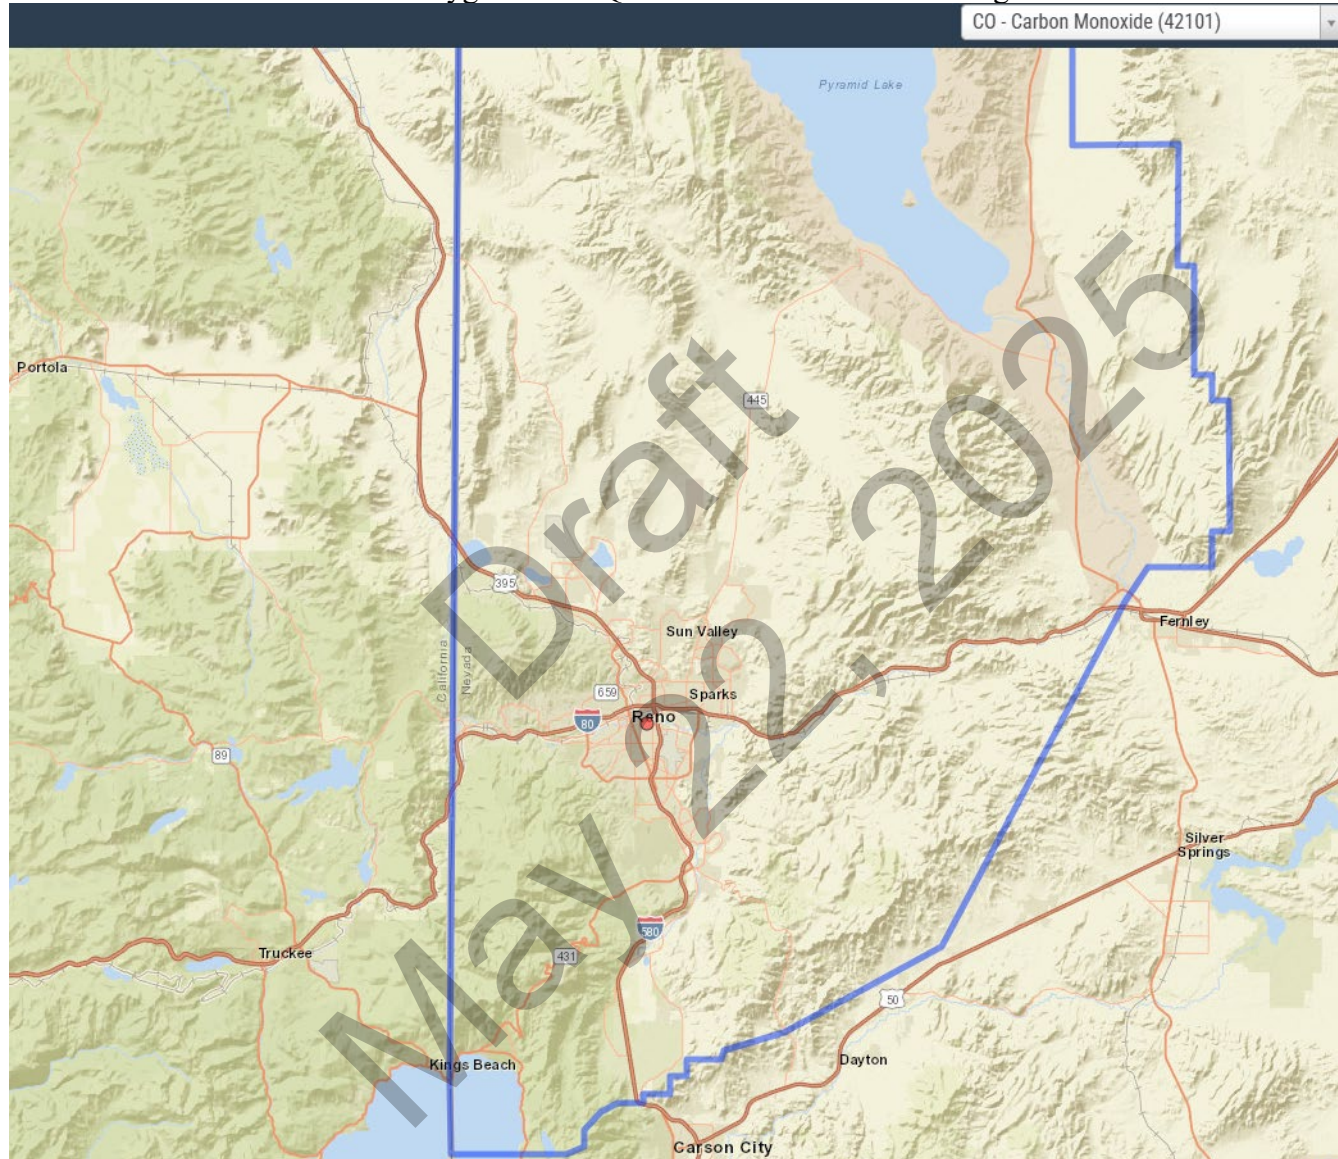


Thiessen Polygons for AQMD's Current NO₂ Monitoring Sites

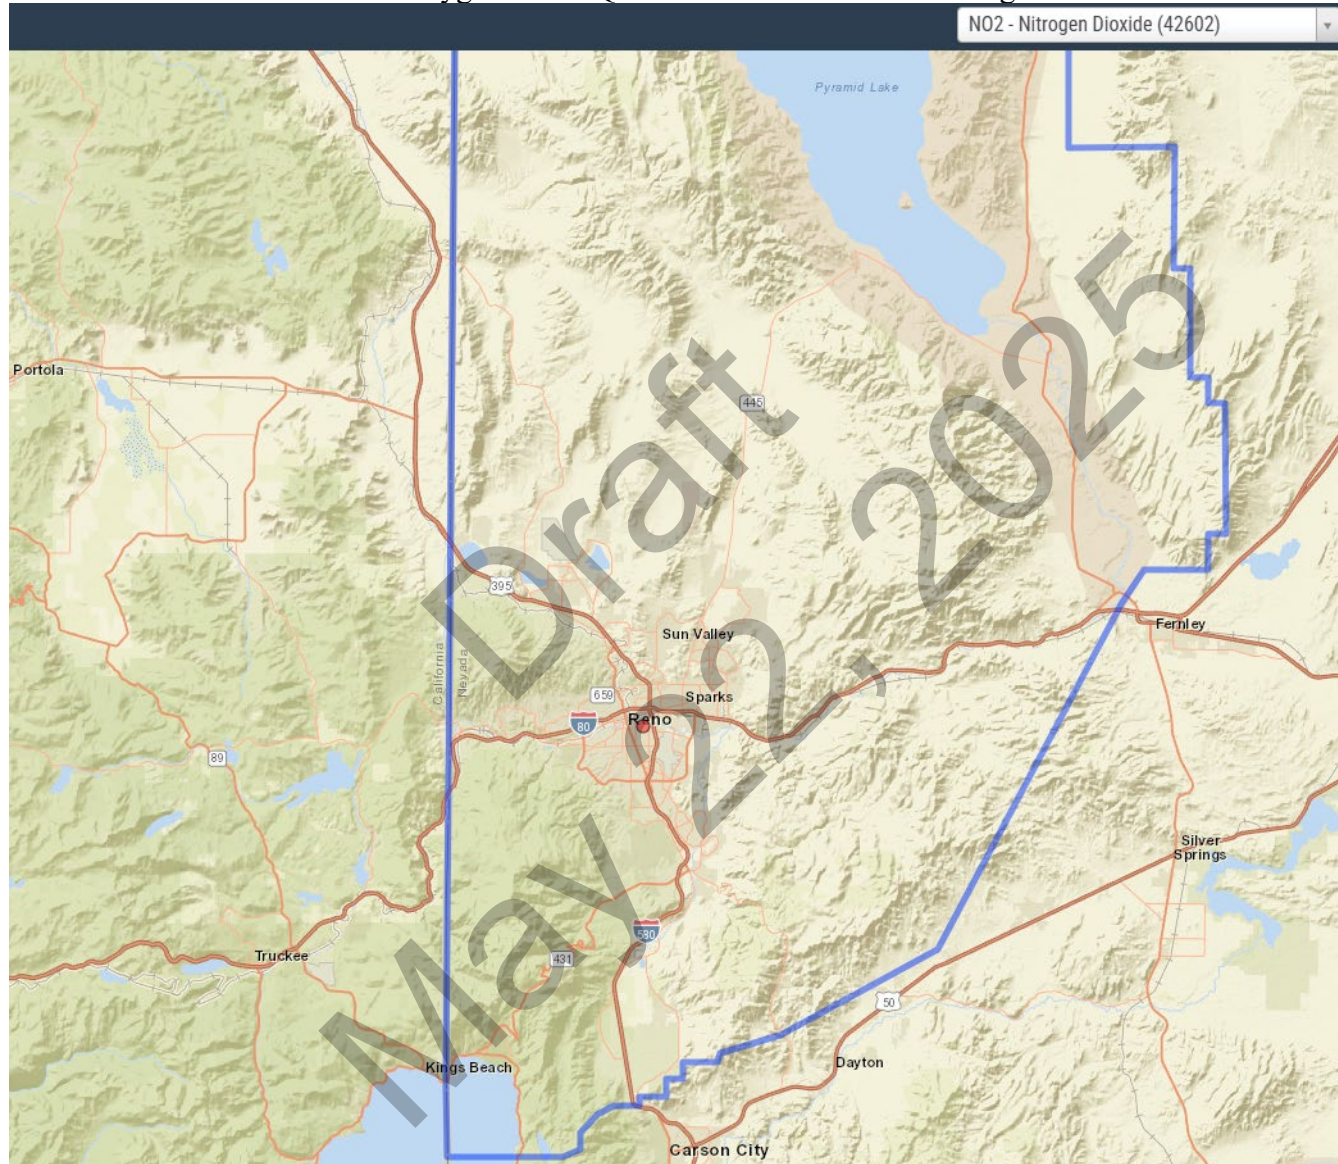


Thiessen Polygons for AQMD's Current PM₁₀ Monitoring Sites

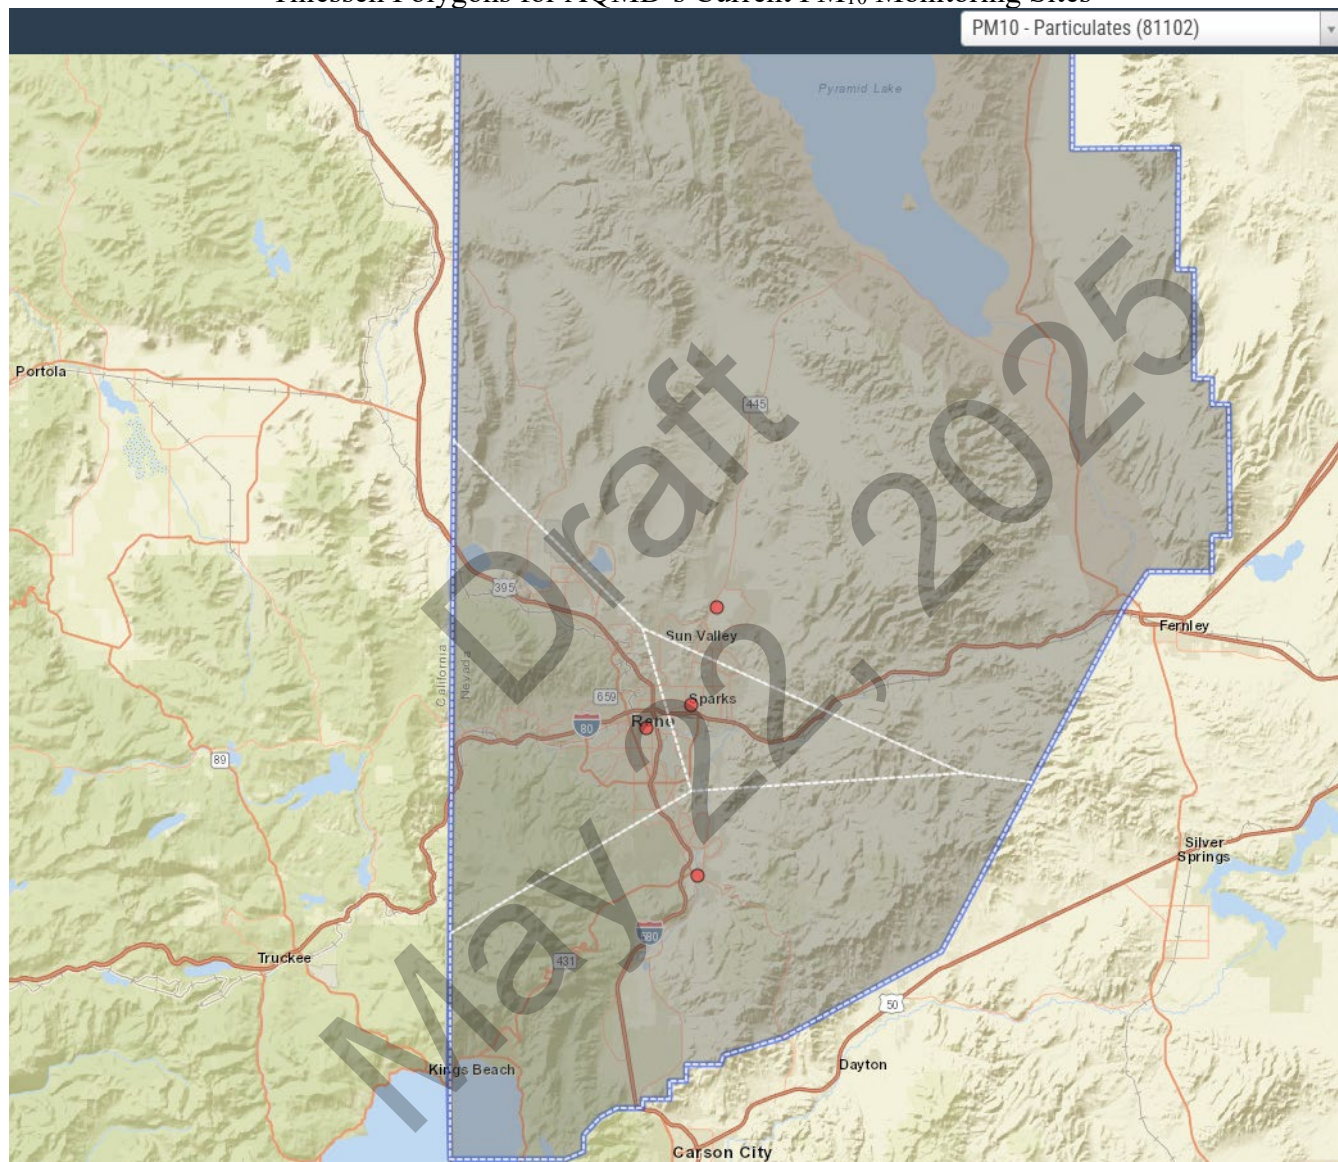

Thiessen Polygons for AQMD's Current PM_{2.5} Monitoring Sites

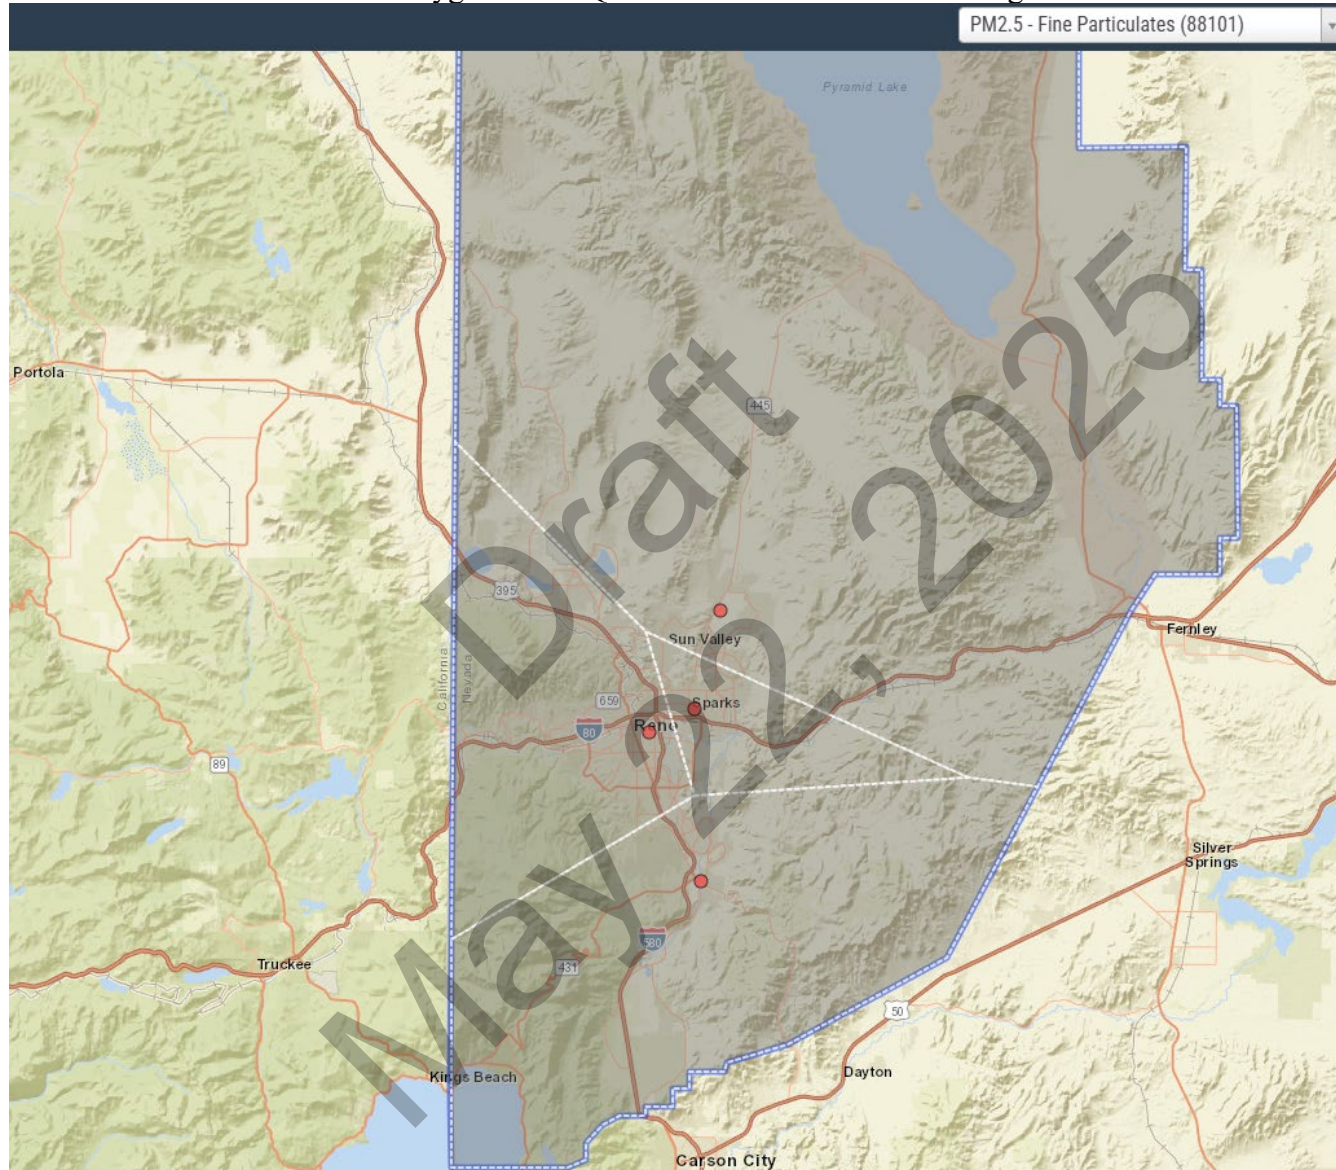

Thiessen Polygons for AQMD's Current SO₂ Monitoring Sites

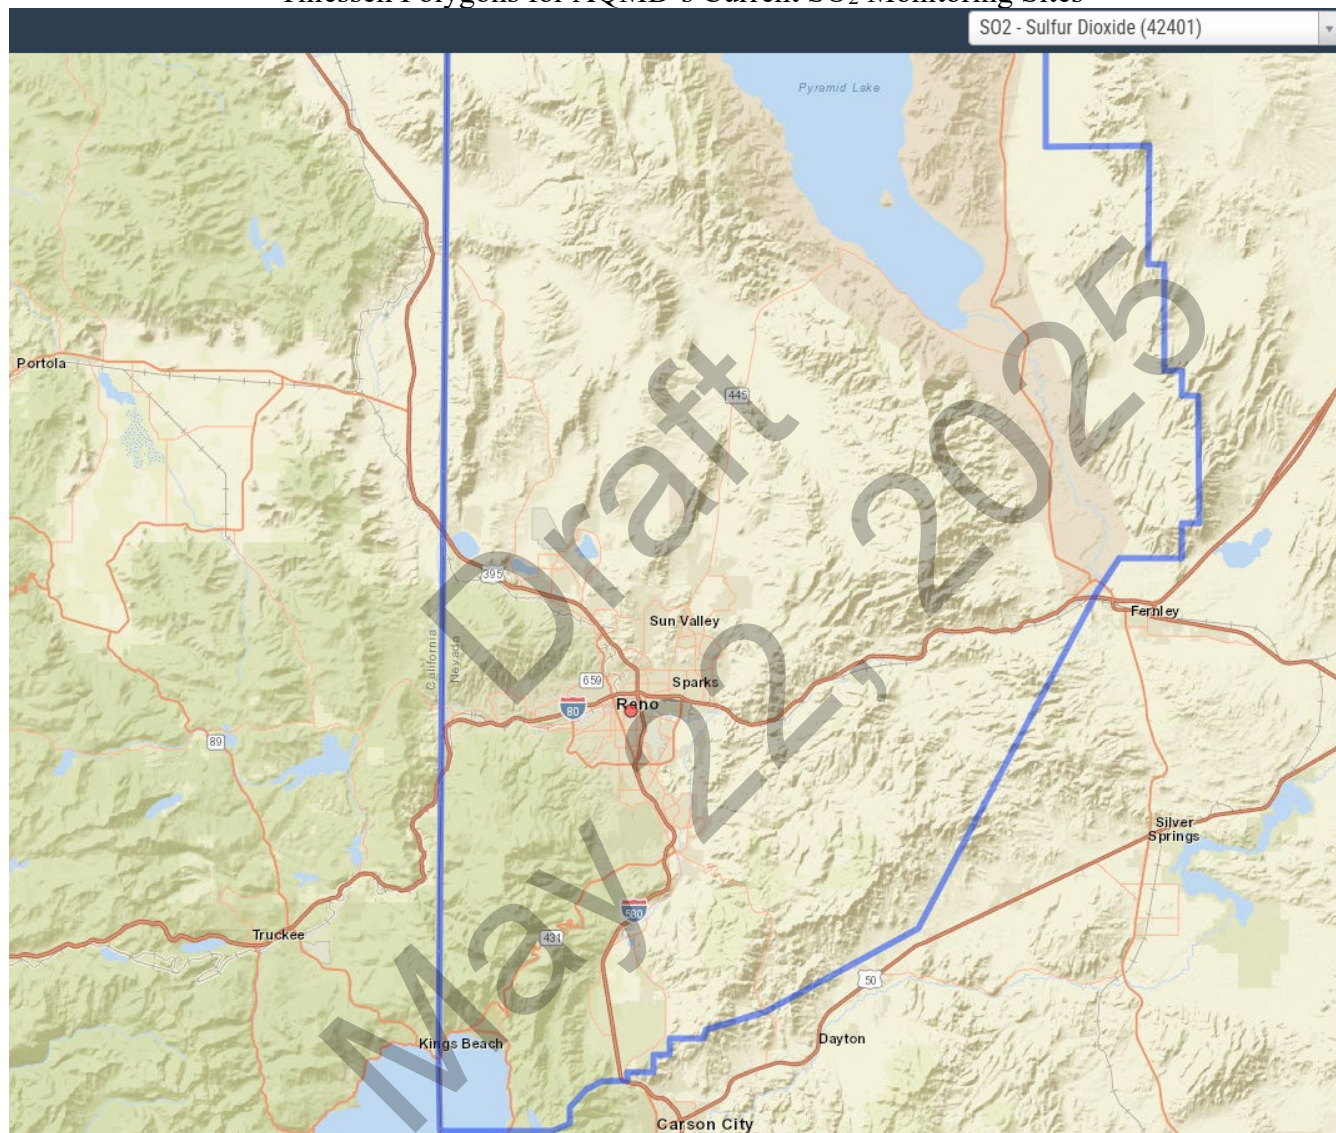


Appendix B


Situational Analysis (Area Served and Population Served Analyses)

Draft
May 22, 2025


Thiessen Polygons for AQMD's Current and Future O₃ Monitoring Sites

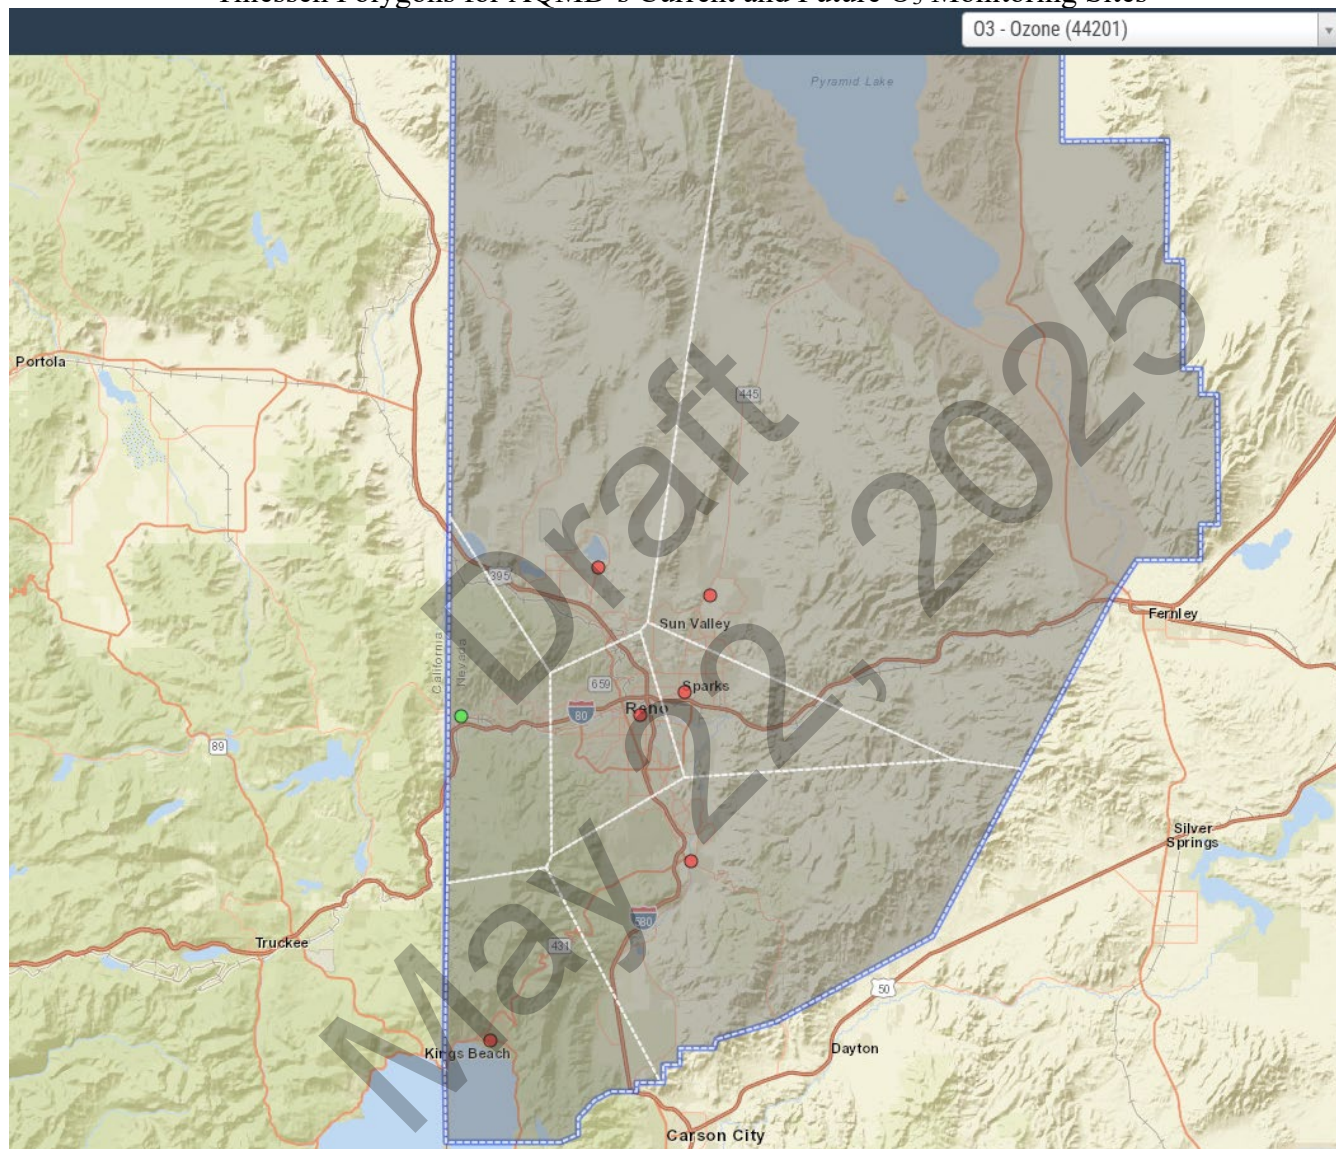

Thiessen Polygons for AQMD's Current and Future PM₁₀ Monitoring Sites

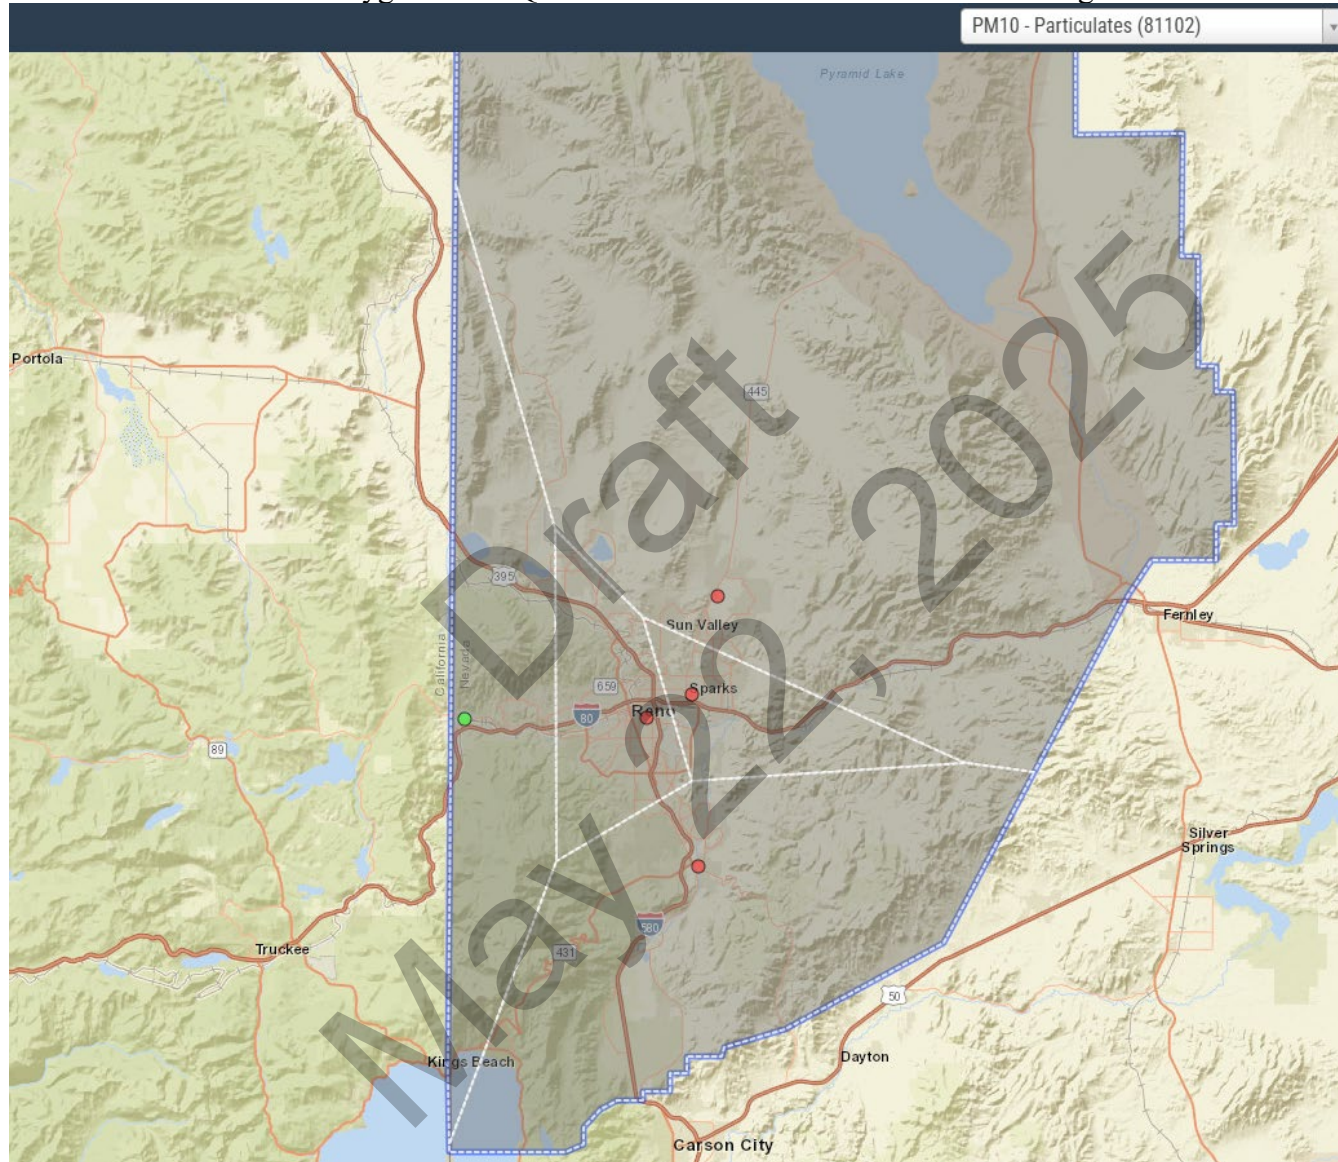

Thiessen Polygons for AQMD's Current and Future PM_{2.5} Monitoring Sites

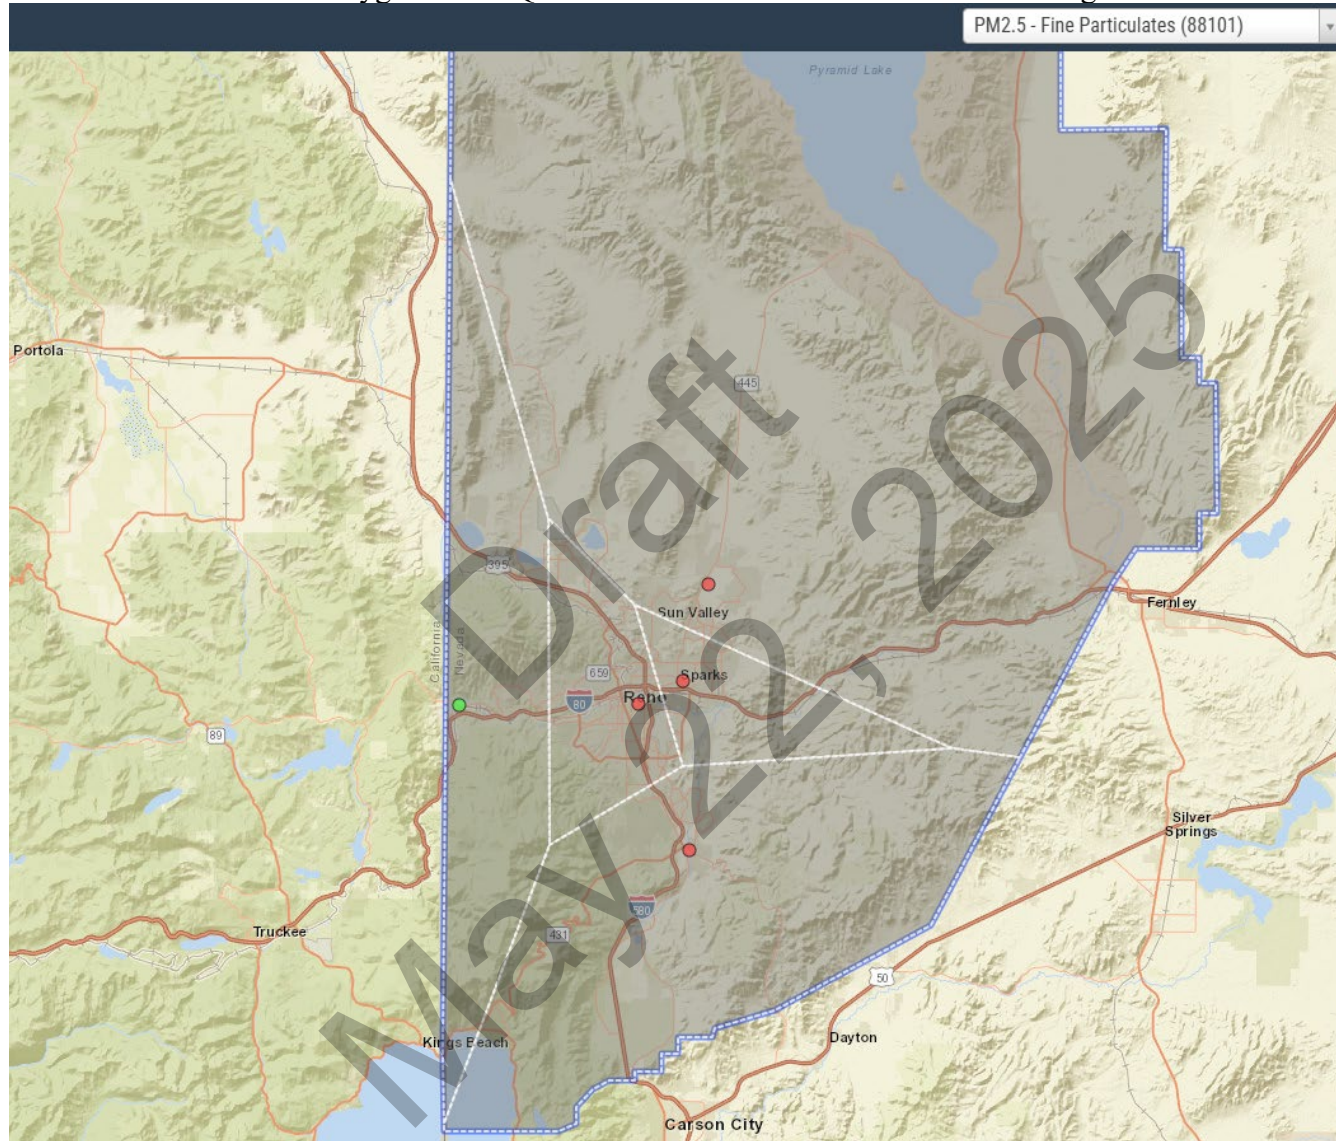

Appendix C

Public Inspection Plan

Draft
May 22, 2025

Public Inspection Plan

The Northern Nevada Public Health issued a press release in English on May 22, 2025, and a press release in Spanish on May 22, 2025, to inform the public of the annual network plan comment period. The press releases provided a web link to the draft plan and explained how to submit written comments during the comment period. A copy of the press releases, all comments received during the comment period, and AQMD's response to the comments are included below.

Draft
May 22, 2025

Press Release

Draft
May 22, 2025

Spanish Press Release

Draft
May 22, 2025